
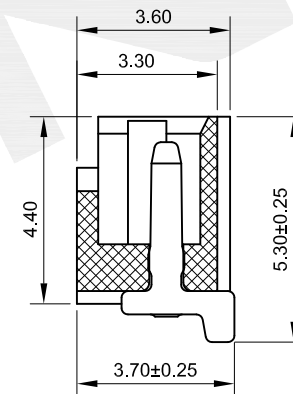
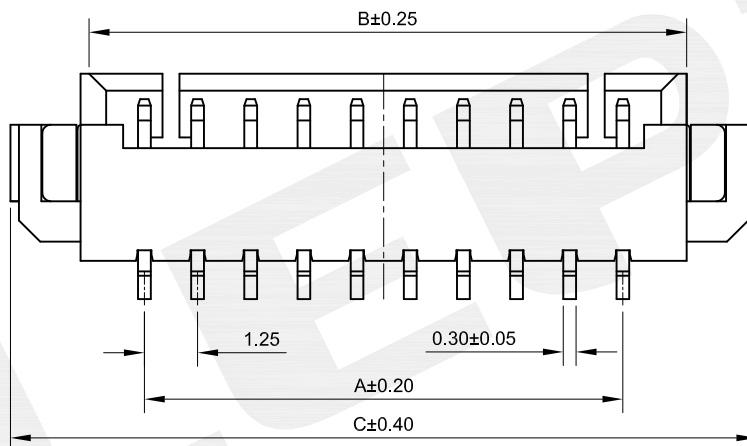



NOTES:
 INSULATOR MATERIAL:THERMOPLASTIC,UL94 V-0
 CONTACT MATERIAL:PHOSPHOR BRONZE
 CURRENT RATING:0.5A
 VOLTAGE RATING:50V,AC/DC
 DIELECTRIC WITHSTAND VOLTAGE:200V,AC/MINUTE
 CONTACT RESISTANCE:30 mΩ MAX
 OPERATION TEMPERATURE:-25 °C TO +85 °C

PART NO:1038-MXXMXX01

NO.of Pins
 Contact Plating
 G0=Gold Flash
 SN:TIN

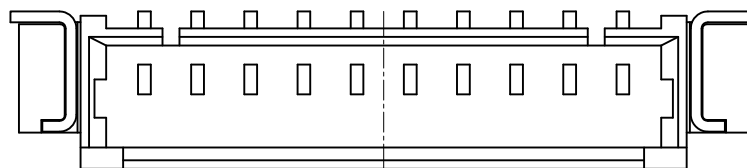

PINS	DIM		
	A	B	C
2P	1.25	4.25	7.55
3P	2.50	5.50	8.80
4P	3.75	6.75	10.05
5P	5.00	8.00	11.30
6P	6.25	9.25	12.55
7P	7.50	10.50	13.80
8P	8.75	11.75	15.05
9P	10.00	13.00	16.30
10P	11.25	14.25	17.55
11P	12.50	15.50	18.80
12P	13.75	16.75	20.05
13P	15.00	18.00	21.30
14P	16.25	19.25	22.55
15P	17.50	20.50	23.80
16P	18.75	21.75	25.05
17P	20.00	23.00	26.30
18P	21.25	24.25	27.55

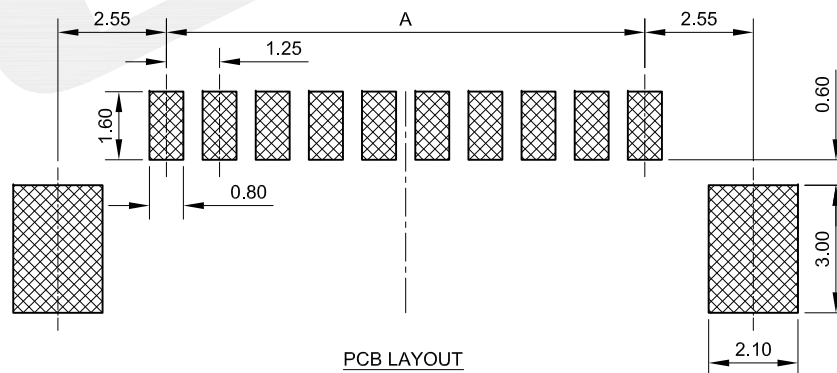

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Loong	2018/11/08	SCALE	FIT	SOLEPIN 东莞市硕品电子有限公司 DONGGUAN SOLEPIN ELECTRONICS CO., LTD. <small>Specializing in the production of connectors and wiring harness products. HTTP://WWW.SOLEPIN.COM E-MAIL:SALES@SOLEPIN.COM TEL:0769-83003805 FAX:0769-83003036</small>	
A/1	2018/11/08	NEW	Loong	Andy	X.X	DESIGN	Jensen	2018/11/08	UNIT	mm	PART NO.	1038-MXXMXX01
					X.XX	CHECK	Jack	2018/11/08	SIZE	A4	TITLE:	1.25mm Wafer 90°SMT,H=4.7
					X.XXX	APPROVE	Andy	2018/11/08	SHEET	1/1	DWG.No.	
					Angle				PROJ.			
					±0.40							
					±0.25							
					±0.15							
					±3°							
					DIM							
					TOL							