

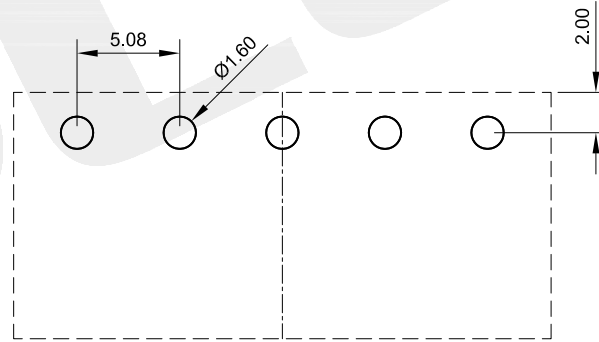
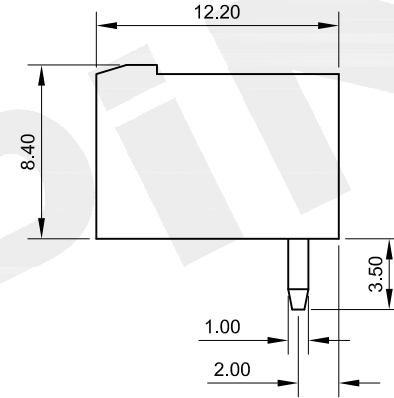


NOTES:
 INSULATOR MATERIAL:PA66,UL94V-0
 CONTACT MATERIAL:BRASS
 CURRENT RATING:10A
 VOLTAGE RATING:250V
 DIELECTRIC WITHSTAND VOLTAGE:AC 2500V,1MINUTE
 INSULATION RESISTANCE:DC 500V 500MΩ
 OPERATION TEMPERATURE:-33℃ TO +105℃

PART NO:1034-M XX X XX 01
 SN:TIN
 02:2PIN
 03:3PIN
 04:4PIN
 05:5PIN
 N/A

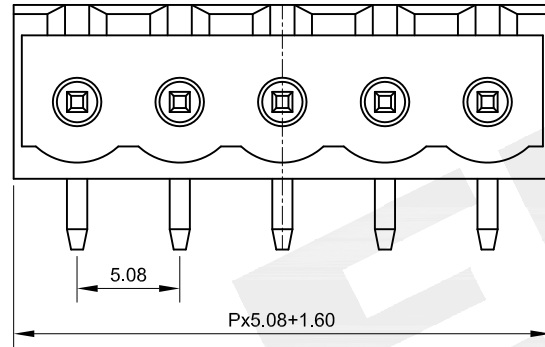

PCB LAYOUT

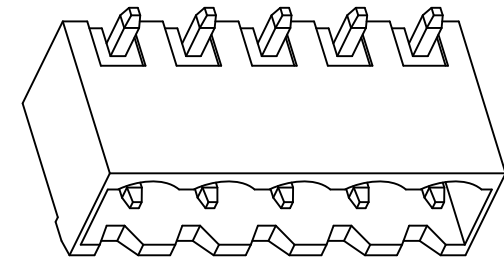

					OPERATION	DRAW	Loong	20181218	SCALE	FIT	SOLEPIN 东莞市硕品电子有限公司 DONGGUAN SOLEPIN ELECTRONICS CO., LTD. Specializing in the production of connectors and wiring harness products. HTTP://WWW.SOLEPIN.COM E-MAIL:SALES@SOLEPIN.COM TEL:0769-83003805 FAX:0769-83003036
					X.X ±0.40	DESIGN	Jensen	20181218	UNIT	mm	
					X.XX ±0.25		CHECK	Jack	20181218	SIZE	
A/1	20181218	NEW	Loong	Andy	X.XXX ±0.15	APPROVE		Andy	20181218	SHEET	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°					TITLE:	PH5.08MM CONNECTOR
					DIM TOL				PROJ.	⊕	DWG.No.