
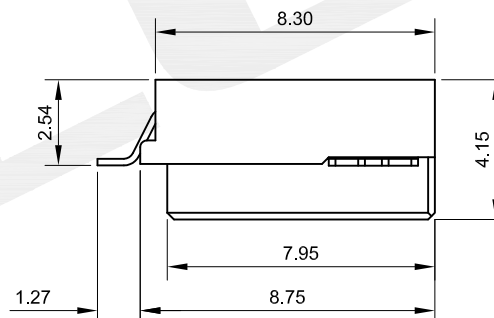
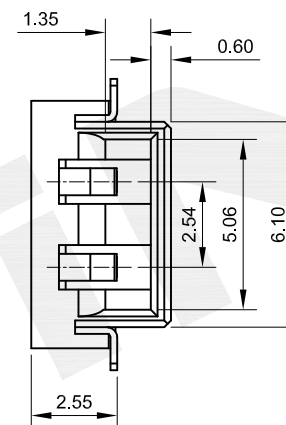
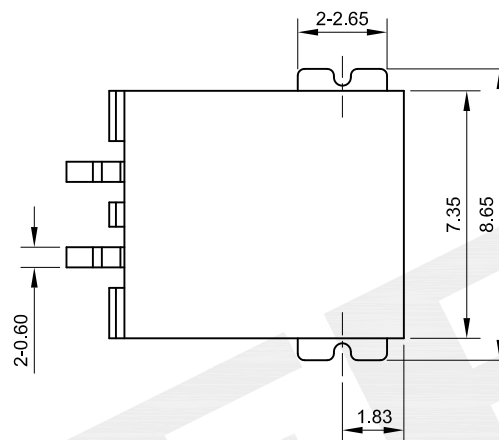
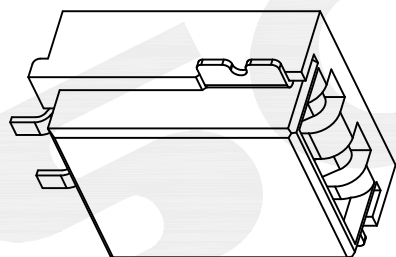


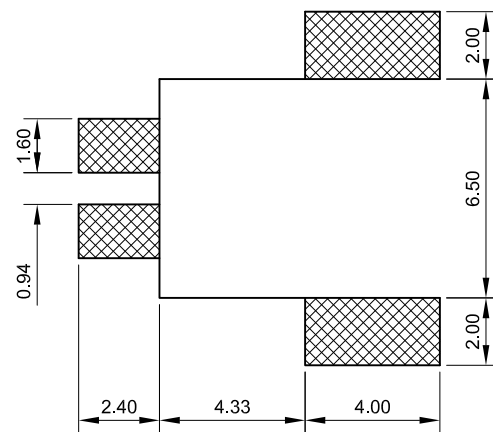

NOTES:
INSULATION MATERIAL:PA9T UL94V-0
CONTACT MATERIAL:BRASS
CURRENT RATIONG:1A
INSULATION RESISTANCE:100MΩ MIN
DIELECTRIC WITHSTANDING:500V AC/DC
CONTACT RESISTANCE:20mΩ MAX
OPERATING TEMPERATURE:-40℃~+105℃

PART NO:1011-F02MXX01

SN:TIN

					OPERATION		DRAW	Loong	20181127	SCALE	FIT	SOLEPIN DONGGUAN SOLEPIN ELECTRONICS CO., LTD Specializing in the production of connectors and wiring harness products HTTP://WWW.SOLEPIN.COM E-MALL-SALES@SOLEPIN.COM TEL:0769-83003805 FAX:0769-83003036	
					X.X	±0.40	DESIGN	Jensen	20181127	UNIT	mm		
					X.XX	±0.25				SIZE	A4	PART NO.	1011-F02MXX01
A0	20181127	NEW	Loong	Andy	X.XXX	±0.15	CHECK	Jack	20181127	SHEET	1/1	TITLE:	LED 2PIN CONNECTOR
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	APPROVE	Andy	20181127	PROJ.		DWG.No.	
					DIM	TOL							