






NOTES:
VOLTAGE RATING:275V.AC/DC
CURRENT RATING:1A
CONTACT RESISTANCE:≤60mΩ
INSULATION RESISTANCE:≥100MΩ
WITHSTANDING VOLTAGE:500V.AC/1MIN
DURABILITY:≥100 MATING CYCLES
TEMPERATURE RANGE: -25℃-105℃
CONTACT MATERIAL:PHOSPHOR BRONZE OR BRASS

PART NO: 1004-A04MXX02

SN: Tin

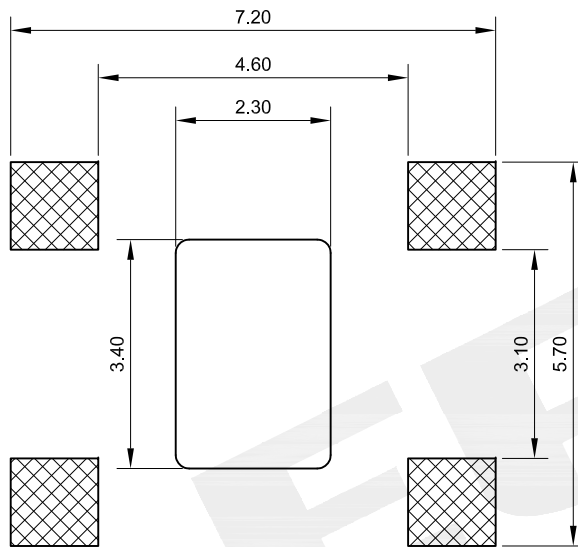

PCB LAYOUT

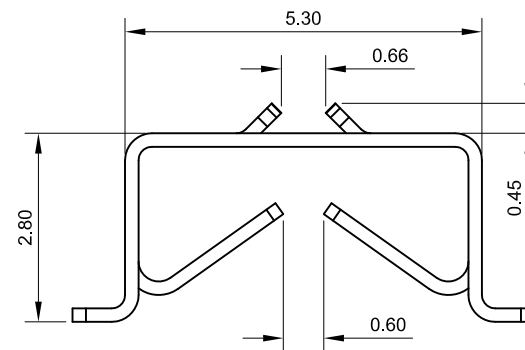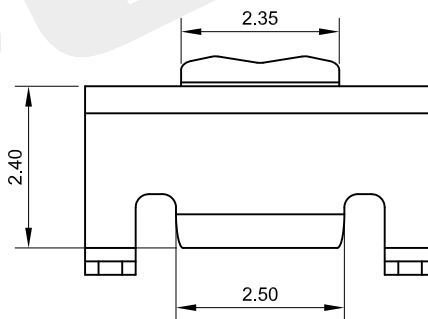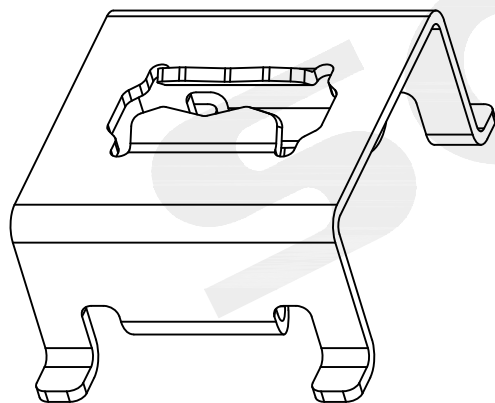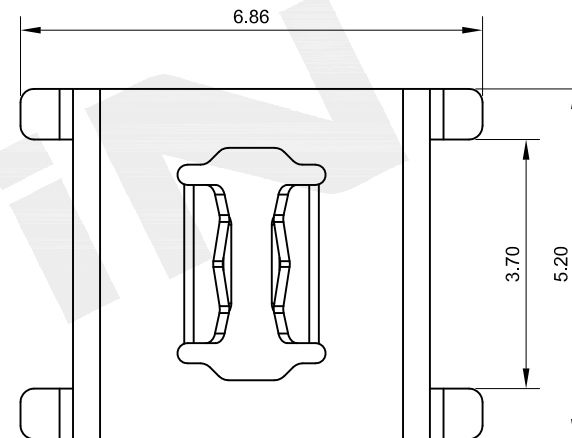

					OPERATION	DRAW	Loong	20181126	SCALE	FIT	SOLEPIN 东莞市硕品电子有限公司 DONGGUAN SOLEPIN ELECTRONICS CO., LTD. Specializing in the production of connectors and wiring harness products. HTTP://WWW.SOLEPIN.COM E-MAIL:SALES@SOLEPIN.COM TEL:0769-83003805 FAX:0769-83003036	
					X.X ±0.40	DESIGN	Jensen	20181126	UNIT	mm		
					X.XX ±0.25				SIZE	A4		
					X.XXX ±0.15	CHECK	Jack	20181126	SHEET	1/1	PART NO.	1004-A04MXX02
A/1	20181126	NEW	Loong	Andy	Angle ±3°	APPROVE	Andy	20181126	PROJ.		TITLE:	LED CONNECTOR
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL						DWG.No.	