


NOTES:  
 CURRENT RATING:1A  
 CONTACT RESISTANCE:30mΩ MAX  
 WITHSTAND VOLTAGE:500V AC/DC  
 INSULATION RESISTANCE:500MΩ MIN  
 OPERATION TEMPERATURE:-40℃ TO +105℃  
 CONTACT MATERIAL:PHOSPHOR BRONZE  
 INSULATOR MATERIAL:LCP UL94V-0

PART NO:6644- M XX XX X 01

No.of pins \_\_\_\_\_ 4:LCP

G0=Gold Flash  
 G1=1u" Gold  
 G3=5u" Gold  
 G5=10u" Gold  
 S0=Gold Flash/Tin  
 S1=1u" Gold/Tin  
 S3=5u" Gold/Tin  
 S5=10u" Gold/Tin  
 SN:TIN

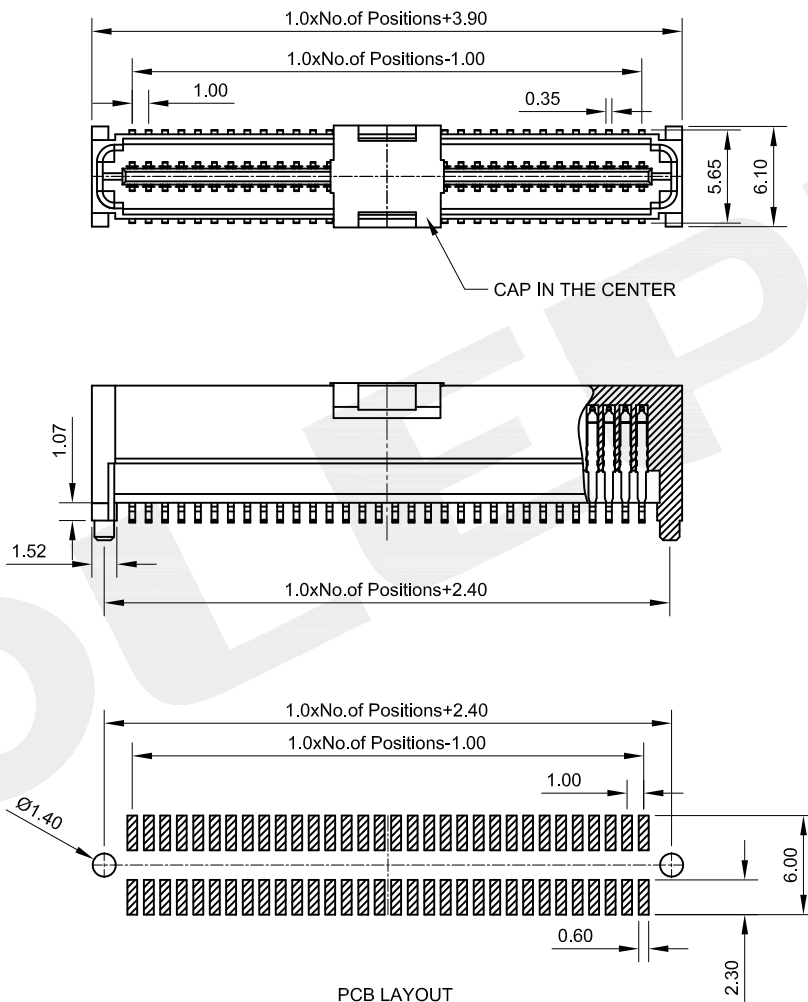

PCB LAYOUT

					OPERATION	DRAW	Loong	20181108	SCALE	FIT	<b>SOLEPIN</b> 东莞市硕品电子有限公司	
					X.X ±0.40	DESIGN	Jensen	20181108	UNIT	mm	DONGGUAN SOLEPIN ELECTRONICS CO., LTD. Specializing in the production of connectors and wiring harness products. HTTP://WWW.SOLEPIN.COM E-MALL:SALES@SOLEPIN.COM TEL:0769-83003805 FAX:0769-83003036	
				X.XX ±0.25	SIZE				A4	PART NO.	6644-MXXXXX01	
A/1	20181108	NEW	Loong	Andy	X.XXX ±0.15				CHECK	Jack	20181108	SHEET
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	APPROVE	Andy	20181108	PROJ.		Customer No.	
					DIM TOL							