NOTES:
INSULATOR MATERIAL:PA9T UL94V-0
CONTACT MATERIAL:C5191
CURRENT RATING:1.5A
INSULATION RESISTANCE:1000MΩ MIN
DIELECTRIC WITHSTANDING:AC 500V
OPERATION TEMPERATURE:-40℃ TO +105℃

PART NO:6661-M XX XX X 01

NO.OF PINS
40-200PIN

3:PA9T

G0=Gold Flash
G1=1u" Gold
G3=5u" Gold
G5=10u" Gold
S0=Gold Flash/Tin
S1=1u" Gold/Tin
S3=5u" Gold/Tin
S5=10u" Gold/Tin
SN:TIN

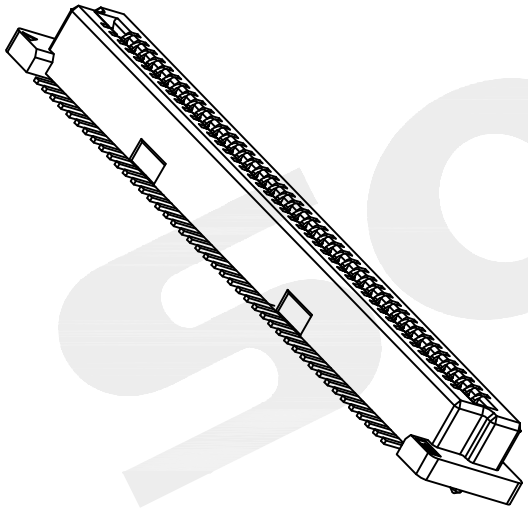



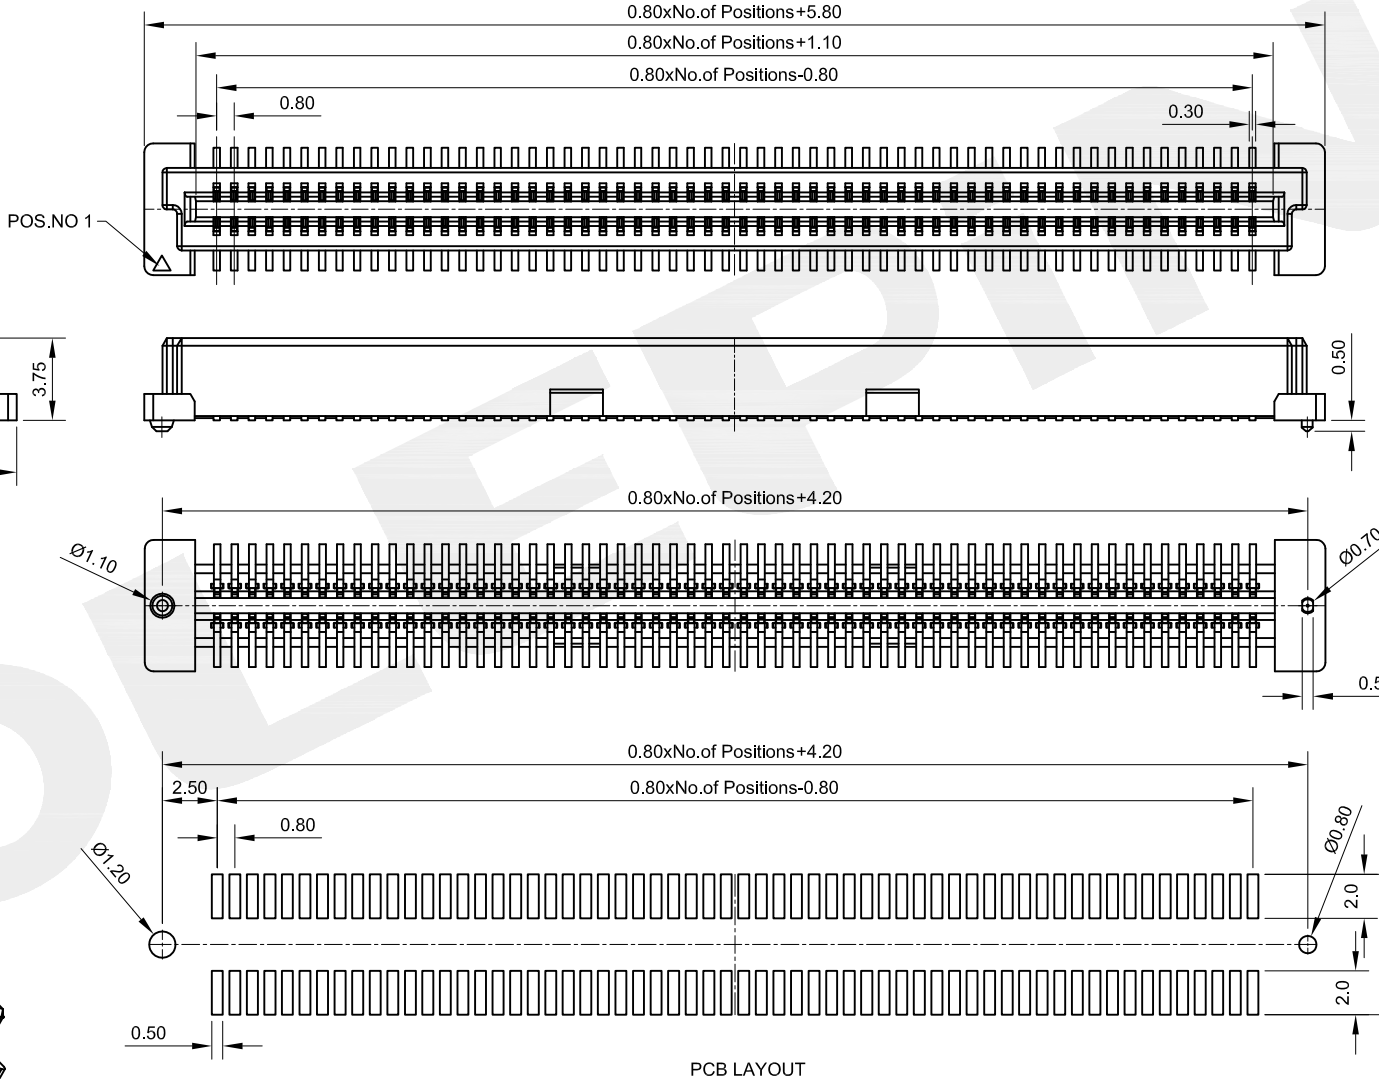

PCB LAYOUT

					OPERATION		DRAW	Loong	2018/11/08	SCALE	FIT	SOLEPIN 东莞市硕品电子有限公司 DONGGUAN SOLEPIN ELECTRONICS CO., LTD.
					X.X	±0.40	DESIGN	Jensen	2018/11/08	UNIT	mm	Specializing in the production of connectors and wiring harness products HTTP://WWW.SOLEPIN.COM E-MALL:SALES@SOLEPIN.COM TEL:0769-83003805 FAX:0769-83003036
					X.XX	±0.25				SIZE	A4	PART NO. 6634-FXXXXB1
					X.XXX	±0.15	CHECK	Jack	2018/11/08	SHEET	1/1	TITLE: 0.8mm BTB connector plug assembly 5.0H type
A/1	2018/11/08	NEW	Loong	Andy	Angle	±3°						
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	Andy	2018/11/08	PROJ.		DWG.No.