




NOTES:  
 INSULATOR MATERIAL:PA9T UL94V-0  
 CONTACT MATERIAL:C5191  
 CURRENT RATING:1.5A  
 INSULATION RESISTANCE:1000MΩ MIN  
 DIELECTRIC WITHSTANDING:AC 500V  
 OPERATION TEMPERATURE:-40℃ TO +105℃

PART NO:6631-M XX XX X 01

NO.OF PINS

3:PA9T

- G0=Gold Flash
- G1=1u" Gold
- G3=5u" Gold
- G5=10u" Gold
- S0=Gold Flash/Tin
- S1=1u" Gold/Tin
- S3=5u" Gold/Tin
- S5=10u" Gold/Tin
- SN:TIN

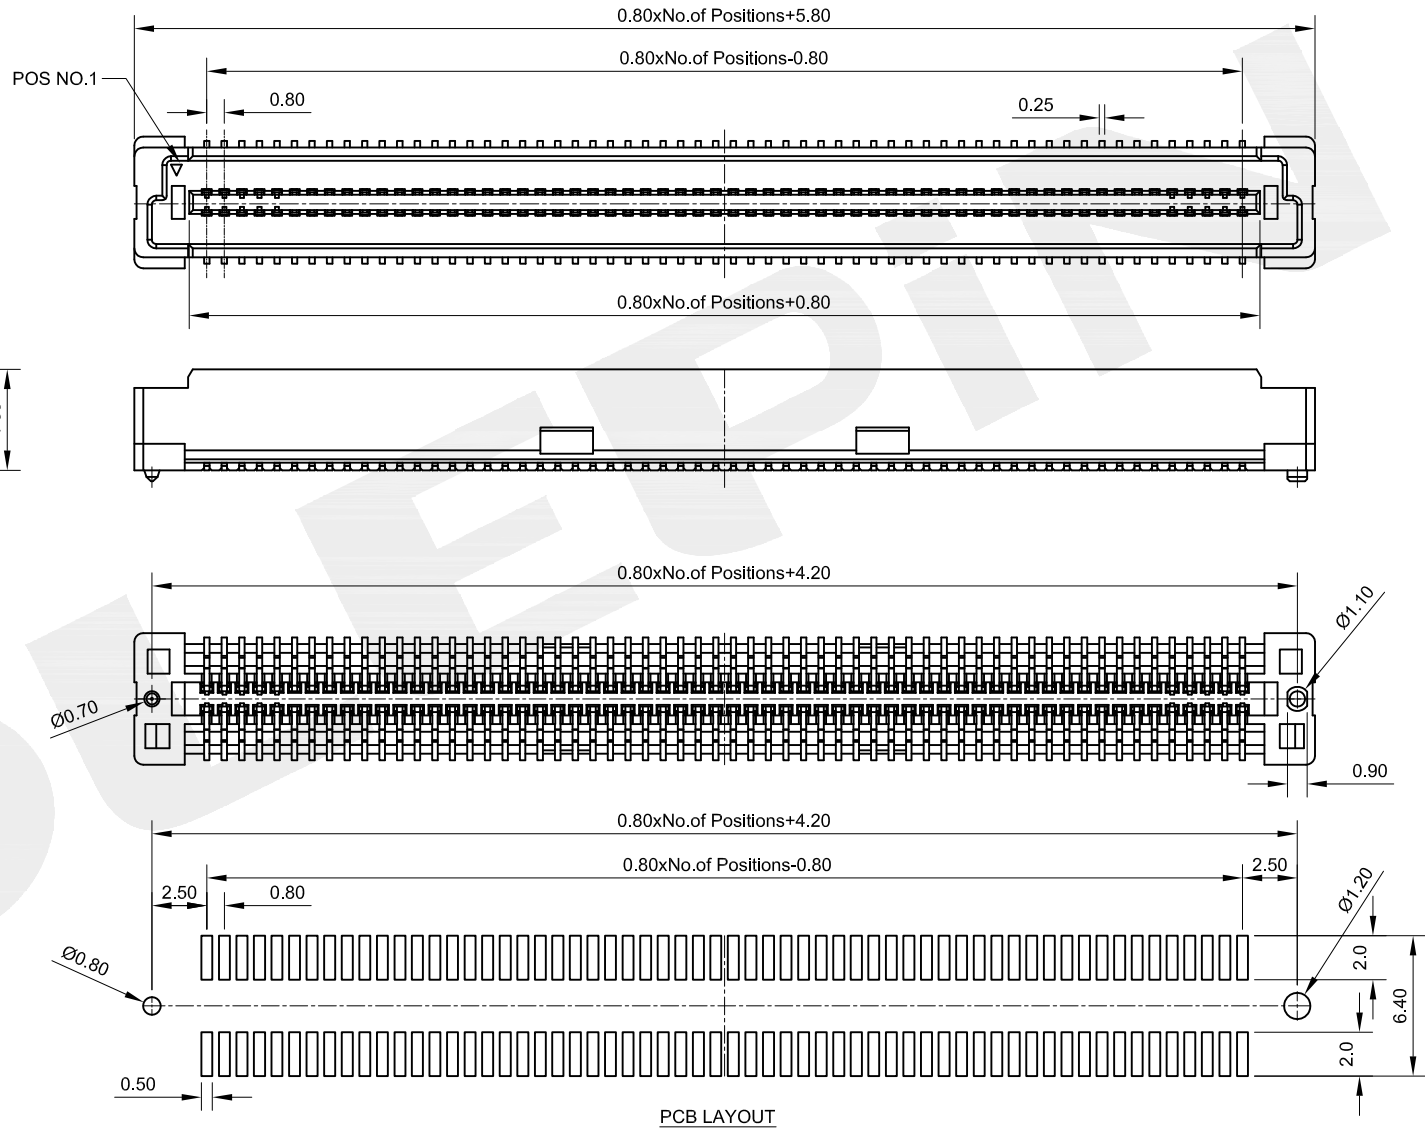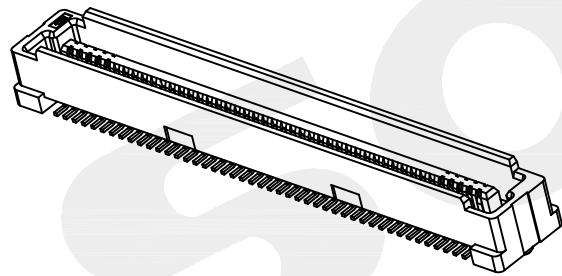

PCB LAYOUT

					OPERATION	DRAW	Loong	2018/11/08	SCALE	FIT	<b>SOLEPIN</b> 东莞市硕品电子有限公司		
					X.X ±0.40	DESIGN	Jensen	2018/11/08	UNIT	mm	DONGGUAN SOLEPIN ELECTRONICS CO., LTD.		
					X.XX ±0.25		JACK	2018/11/08	SIZE	A4	PART NO.	6631-MXXXXX01	
A/1	2018/11/08	NEW	Loong	Andy	X.XXX ±0.15		Angle ±3°	2018/11/08	SHEET	1/1	TITLE:	0.8mm BTB connector plug assembly 5.0H type	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	Andy	2018/11/08	PROJ.	DWG.No.		

Specializing in the production of connectors and wiring harness products.  
 HTTP://WWW.SOLEPIN.COM E-MAIL:SALES@SOLEPIN.COM TEL:0769-83003805 FAX:0769-83003036