
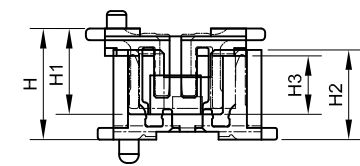
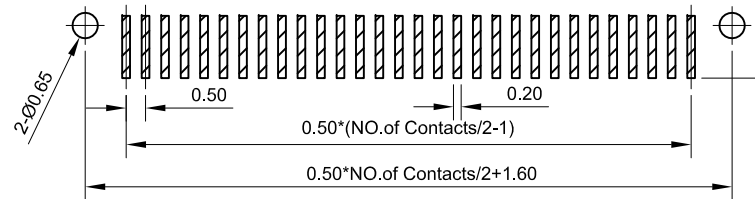
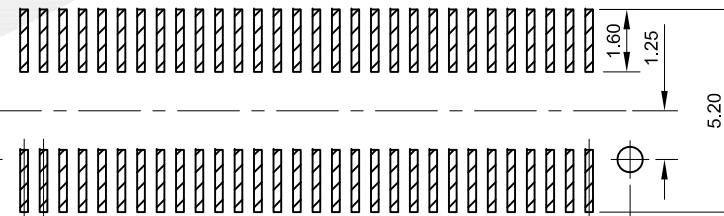

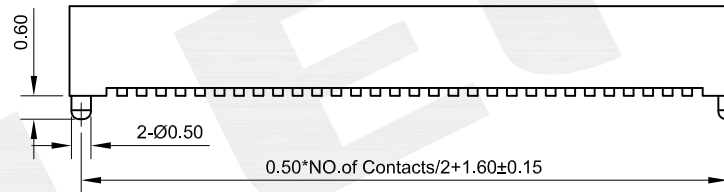


NOTES:
 INSULATOR MATERIAL:POLYESTER UL94V-0
 CONTACT MATERIAL:PHOSPHOR BRONZE
 CURRENT RATING:0.5A
 CONTACT RESISTANCE:20mΩ MAX
 WITHSTAND VOLTAGE:200V AC/DC
 INSULATION RESISTANCE:100MΩ MIN
 OPERATION TEMPERATURE:-40℃ TO +105℃

PART NO:6614-F XX XX X 01

No.of pins ———— 3:PA9T
 ———— 4:LCP

G0=Gold Flash
 G1=1u" Gold
 G3=5u" Gold
 G5=10u" Gold
 S0=Gold Flash/Tin
 S1=1u" Gold/Tin
 S3=5u" Gold/Tin
 S5=10u" Gold/Tin
 SN:TIN

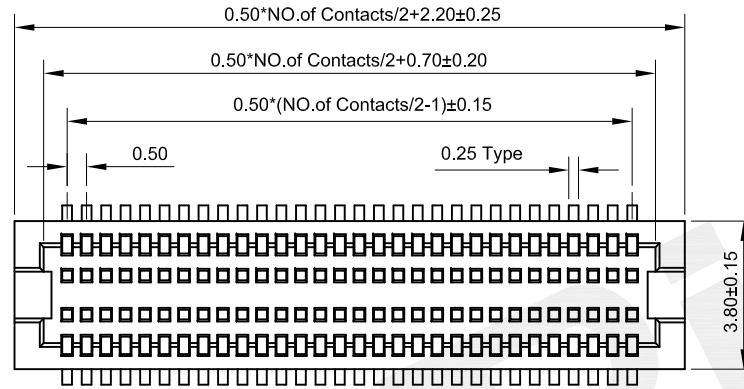

Assembly Height (H)	Plug Height (H1)	Socket Height (H2)	Insertion Height (H3)
3.0	2.2	2.3	1.6
5.0	2.7	4.3	2.0

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		Loong	20181108	SCALE	FIT	SOLEPIN 东莞市硕品电子有限公司		
					DIM	TOL					DONGGUAN SOLEPIN ELECTRONICS CO., LTD. Specializing in the production of connectors and wiring harness products. HTTP://WWW.SOLEPIN.COM E-MALL:SALES@SOLEPIN.COM TEL:0769-83003805 FAX:0769-83003036		
A/1	20181108	NEW	Loong	Andy	X.X	±0.40	DESIGN	Jensen	20181108	UNIT	mm	PART NO.	6614- FXXXXX01
					X.XX	±0.25	CHECK	Jack	20181108	SIZE	A4	TITLE:	0.50mm Board to Board,Female
					X.XXX	±0.15	APPROVE	Andy	20181108	SHEET	1/1	Customer No.	
					Angle	±3°				PROJ.			