
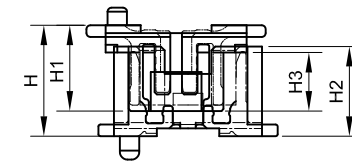
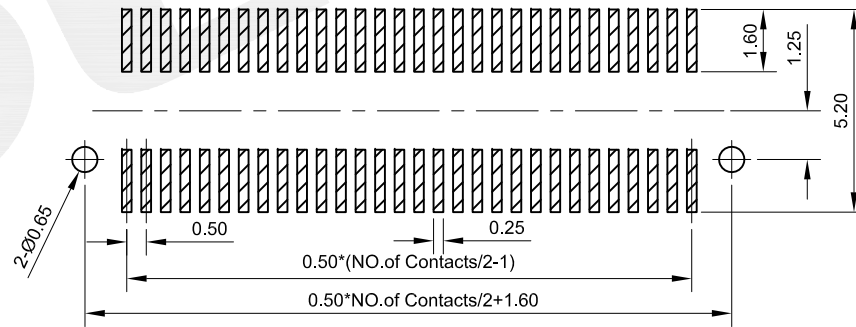

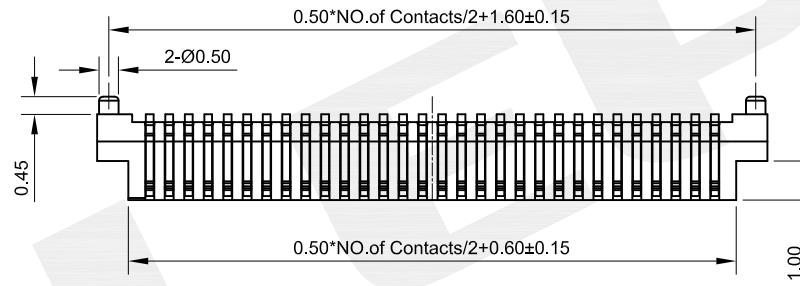


NOTES:  
 INSULATOR MATERIAL:POLYESTER UL94V-0  
 CONTACT MATERIAL:PHOSPHOR BRONZE  
 CURRENT RATING:0.5A  
 CONTACT RESISTANCE:20mΩ MAX  
 WITHSTAND VOLTAGE:200V AC/DC  
 INSULATION RESISTANCE:100MΩ MIN  
 OPERATION TEMPERATURE:-40℃ TO +105℃

PART NO:6614-M XX XX X 01

No.of pins 3:PA9T  
 4:LCP

G0=Gold Flash  
 G1=1u" Gold  
 G3=5u" Gold  
 G5=10u" Gold  
 S0=Gold Flash/Tin  
 S1=1u" Gold/Tin  
 S3=5u" Gold/Tin  
 S5=10u" Gold/Tin  
 SN:TIN

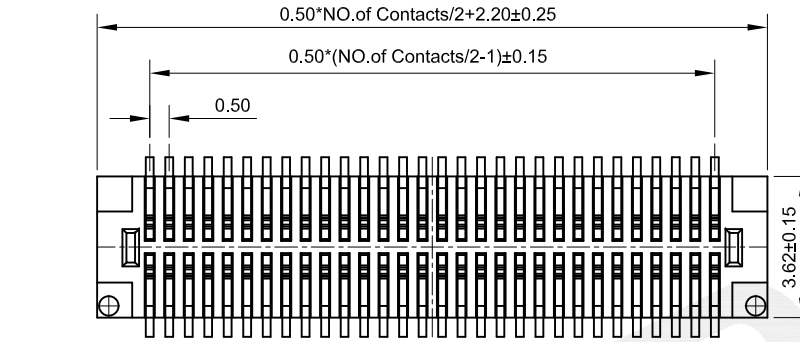

ASSEMBLY

Assembly Height (H)	Plug Height (H1)	Socket Height (H2)	Insertion Height (H3)
3.0	2.2	2.3	1.6
5.0	2.7	4.3	2.0

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	Loong	20181108	SCALE	FIT	SOLEPIN 东莞市硕品电子有限公司	
					DIM	TOL						DONGGUAN SOLEPIN ELECTRONICS CO., LTD. Specializing in the production of connectors and wiring harness products. HTTP://WWW.SOLEPIN.COM E-MALL:SALES@SOLEPIN.COM TEL:0769-83003805 FAX:0769-83003036	
A/1	20181108	NEW	Loong	Andy	X.X	±0.40	DESIGN	Jensen	20181108	UNIT	mm	PART NO.	6614- MXXXXX01
					X.XX	±0.25	CHECK	Jack	20181108	SIZE	A4	TITLE:	0.50mm Board to Board, Male
					X.XXX	±0.15	APPROVE	Andy	20181108	SHEET	1/1	Customer No.	
					Angle	±3°				PROJ.			