






NOTES:  
 INSULATOR MATERIAL:PA9T+30%G.F UL94V-0  
 CONTACT MATERIAL:PHOSPHOR BRONZE  
 CURRENT RATING:0.5A  
 CONTACT RESISTANCE:60mΩ MAX  
 WITHSTAND VOLTAGE:500V AC/DC  
 INSULATION RESISTANCE:100MΩ MIN  
 OPERATION TEMPERATURE:-40℃ TO +105℃

PART NO:6613-M XX XX X 01

No. of pins 3:PA9T

G0=Gold Flash  
 G1=1u" Gold  
 G3=5u" Gold  
 G5=10u" Gold  
 S0=Gold Flash/Tin  
 S1=1u" Gold/Tin  
 S3=5u" Gold/Tin  
 S5=10u" Gold/Tin  
 SN:TIN

PIN'S	DIM A
4~34	4.00
36~100	8.00

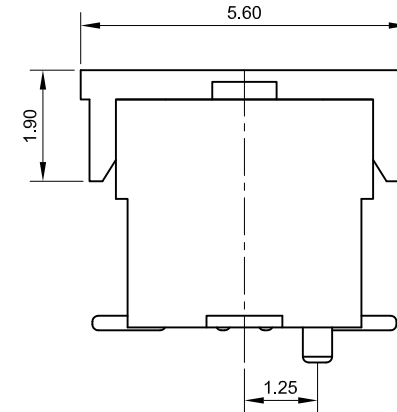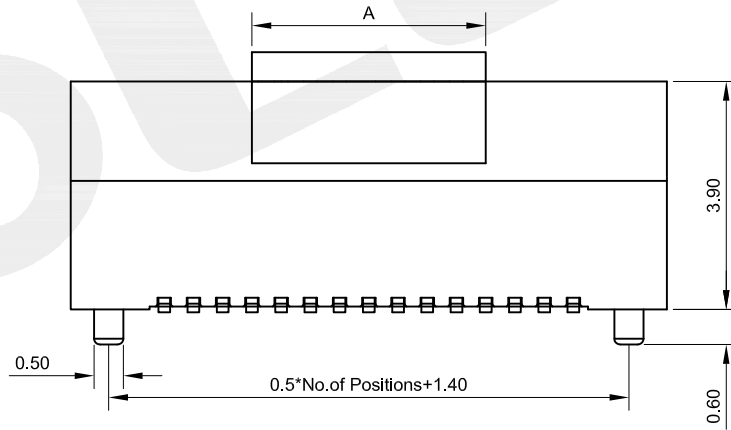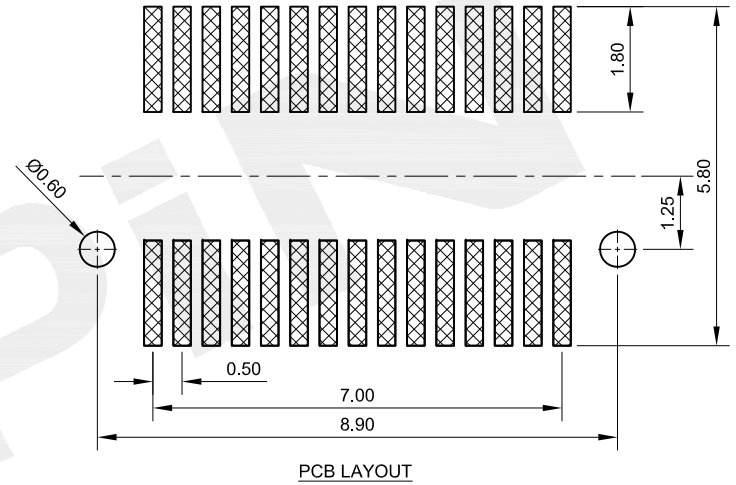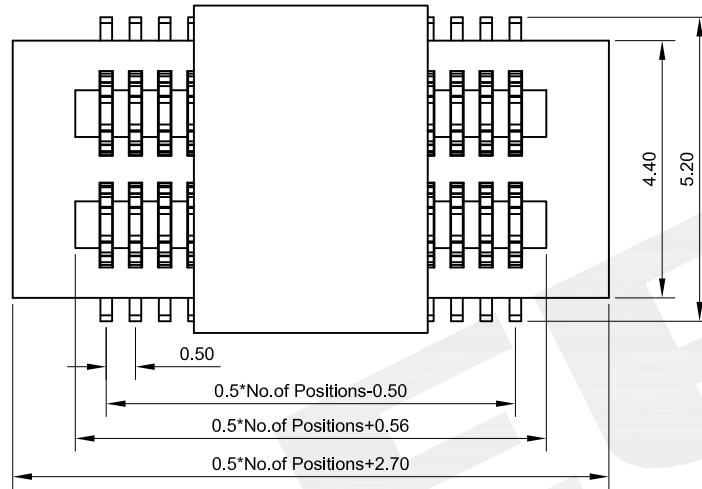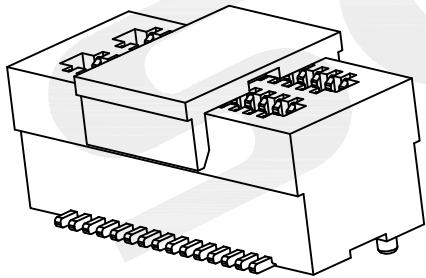

					OPERATION	DRAW	Loong	20181108	SCALE	FIT	<b>SOLEPIN</b> 东莞市硕品电子有限公司		
					X.X	±0.40	DESIGN	Jensen	20181108	UNIT	mm	DONGGUAN SOLEPIN ELECTRONICS CO., LTD. Specializing in the production of connectors and wiring harness products. HTTP://WWW.SOLEPIN.COM E-MALL:SALES@SOLEPIN.COM TEL:0769-83003805 FAX:0769-83003036	
					X.XX	±0.25	CHECK	Jack	20181108	SIZE	A4	PART NO.	6613- FXXXXX01
A/1	20181108	NEW	Loong	Andy	X.XXX	±0.15	APPROVE	Andy	20181108	SHEET	1/1	TITLE:	0.5mm BTB Socket SMT
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°				PROJ.	⊕	Customer No.	
					DIM	TOL							