

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP BLACK,UL94V-0.
- 1.2 CONTACT: PHOSPHOR BRONZE ,GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA,50u" MIN. NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING:3A;
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MINUTE.
- 2.3 CONTACT RESISTANCE: 30mΩ MAX.
- 2.4 INSULATION RESISTANCE: 1000MΩ MIN.
- 2.5 OPERATION TEMPERATURE:-40°C TO +105°C.






3.ORDER INFORMATION:

61C1 - XXX XX 078 C 03 - XX

Pin数码	端子电镀:	塑胶高度:	包装方式:	"B"SPACES PIN数:
010=2x5PIN	S1=1u" Gold/Tin	078=7.8mm	C=TRAY	01=2x1PIN
.....	S2=3u" Gold/Tin			
200=2x100PIN	S3=5u" Gold/Tin			50=2x50PIN
	S4=10u" Gold/Tin			
	S5=15u" Gold/Tin			
	S6=30u" Gold/Tin			

TABLE1:

No. OF PIN	A	B	C	D	E	F	G
026:2x13PIN	12.80	5	3.20	5.30	15.00	18.20	15.80
030:2x15PIN	14.40	5	3.20	5.30	16.60	19.80	17.40
050:2x25PIN	22.40	5	3.20	5.30	24.60	27.80	25.40
074:2x37PIN	32.00	20	15.20	17.30	34.20	37.40	35.00
080:2x40PIN	34.40	21	16.00	18.10	36.60	39.80	37.40
098:2x49PIN	41.60	26	20.00	22.10	43.80	47.00	44.60
100:2x50PIN	42.40	26	20.00	22.10	44.60	47.80	45.40
120:2x60PIN	50.40	31	24.00	26.10	52.60	55.80	53.40
140:2x70PIN	58.40	31	24.00	26.10	60.60	63.80	61.40
160:2x80PIN	66.40	31	24.00	26.10	68.60	71.80	69.40
180:2x90PIN	74.40	31	24.00	26.10	76.60	79.80	77.40
200:2x100PIN	82.40	31	24.00	26.10	84.60	87.80	85.40
200:2x100PIN	82.40	50	39.20	41.30	84.60	87.80	85.40

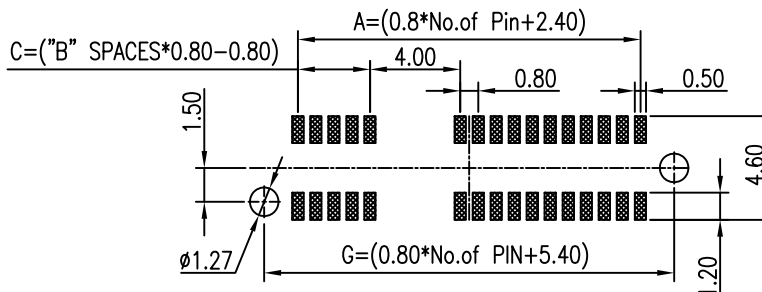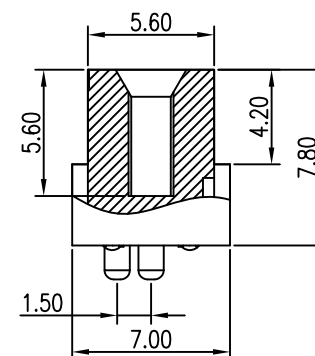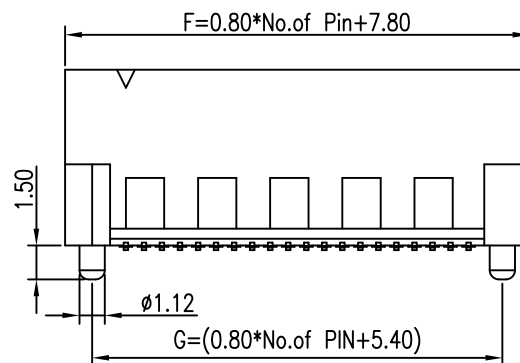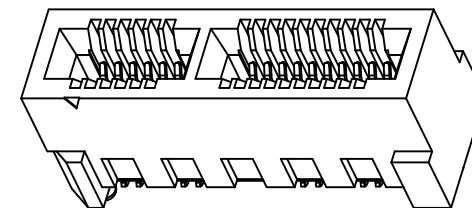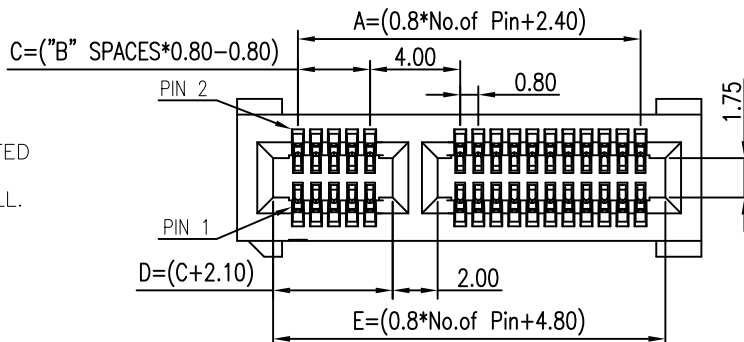

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05

OPERATION		DRAW	WLY	2021.03.01
X.X	±0.40	DESIGN	Jensen	2021.03.01
X.XX	±0.25	CHECK	Jack	2021.03.01
X.XXX	±0.15	APPROVE	Andy	2021.03.01
Angle	±3°	UNIT	mm	SCALE 1:1
DIM.	TOL	PROJ.	1:1	DRAW NO.

SOLEPIN 东莞市硕品电子有限公司
Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.

SIZE	A4	PART NO.	61C1-XXXXX078C03-XX
SHEET	1/1	TITLE:	0.80mm 金手指 180° SMT 带隔栏 C形焊脚
PROJ.	1:1	DRAW NO.	SP-441

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
AO		NEW		