

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP BLACK,UL94V-0.
- 1.2 CONTACT: BeCu,GOLD (SEE P/N) PLATED IN CONTACT AREA,
50u" MIN. NICKEL UNDERPLATED OVERALL.

2.ORDER INFORMATION:

- 2.1 CURRENT RATING: 2 A PER PIN(2 PINS POWERED).
- 2.2 VOLTAGE RATING: 225V AC/318V DC.
- 2.3 OPERATION TEMPERATURE:-40°C TO +105°C.




3. ELECTRICAL:

61D1-F XXX XX 078 R 01



Pin数码 SEE TABLE	端子电镀: G0=Gold Flash(全金) G1=1u" Gold G2=3u" Gold G3=5u" Gold G4=10u" Gold G5=15u" Gold G6=30u" Gold	塑胶高度: 078=7.80mm	包装方式: R=REEL
--------------------	---	---------------------	-----------------

TABLE1:

No. OF PIN	A	B	C	D	E	F	G	H
020=2x10PIN	16.50	11.30	NA	NA	9.00	13.25	9.00	NA
040=2x20PIN	26.50	21.30	NA	NA	19.00	23.25	19.00	NA
060=2x30PIN	36.50	31.30	NA	NA	29.00	33.25	29.00	NA
080=2x40PIN	49.50	44.30	19.15	17.00	42.00	46.25	42.00	17.00
100=2x50PIN	59.50	54.30	24.15	22.00	52.00	56.25	52.00	22.00
120=2x60PIN	69.50	64.30	29.15	27.00	62.00	66.25	62.00	27.00
140=2x70PIN	79.50	74.30	34.15	32.00	72.00	76.25	72.00	32.00
160=2x80PIN	89.50	84.30	39.15	37.00	82.00	86.25	82.00	37.00
180=2x90PIN	99.50	94.30	44.15	42.00	92.00	96.25	92.00	42.00
200=2x100PIN	109.50	104.30	49.15	47.00	102.00	106.25	102.00	47.00

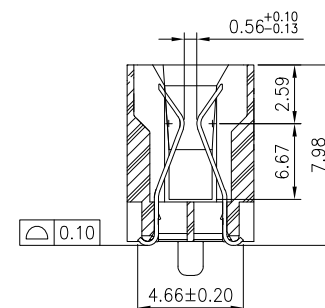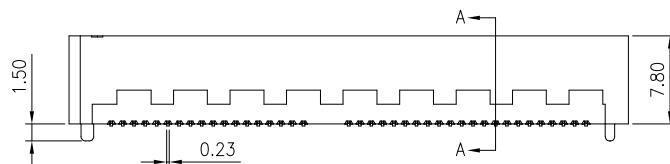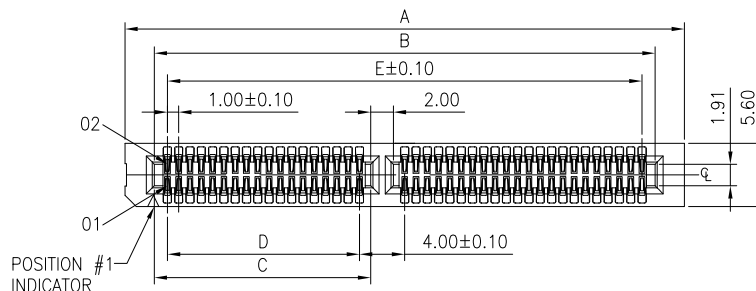

SECTION:A-A
SCALE2:1

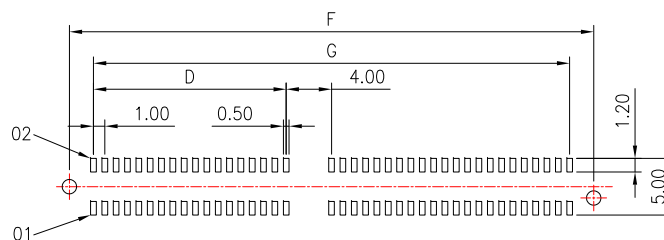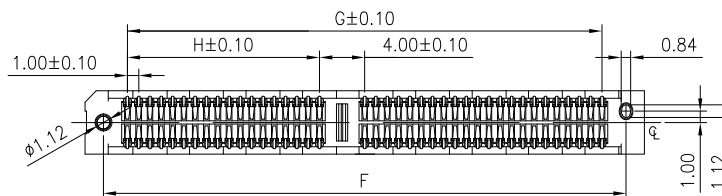

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLERANCE±0.05

					OPERATION		DRAW		WLY		2021.02.03		SOLEPiN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X	±0.40	DESIGN		Jensen		2021.02.03					
					X.XX	±0.25	CHECK		Jack		2021.02.03					
					X.XXX	±0.15	APPROVE		Andy		2021.02.03					
A0		NEW			Angle	±3°	APPROVE		Andy		2021.02.03		SIZE	A4	PART NO.	61D1-FXXXXX078R01
													SHEET	1/1	TITLE:	1.0mm 金手指 SMT 180° TYPE 带隔栏
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM.	TOL	UNIT		mm	SCALE	1:1	PROJ.		DRAW NO.	SP-600