

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP BLACK,UL94V-0.
- 1.2 CONTACT: PHOSPHOR COPPER.
GOLD (SEE P/N) PLATED,
50u" MIN. NICKEL UNDERPLATED OVER ALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING: 0.3 A.
- 2.2 VOLTAGE RATING: 50 V AC.
- 2.3 CONTACT RESISTANCE: 50mΩ MAX.
- 2.4 INSULATION RESISTANCE: 500MΩ MIN.
- 2.5 WITHSTANDING VOLTAGE: 150V AC/1MINUTE.
- 2.6 OPERATION TEMPERATURE: -55°C TO +125°C.




3.ORDER INFORMATION:

66A1-F XXX XX 023 R 01




Pin数码	端子电镀:	塑胶高度:	包装方式:
010=2*05PIN	G0=Gold Flash	023=2.30mm	R=REEL
~	G1=1u" Gold		
080=2*40PIN	G2=3u" Gold		
	G3=5u" Gold		
	G4=10u" Gold		
	G5=15u" Gold		
	G6=30u" Gold		

TABLE1:

No. OF PIN	A	B	C	D
010=2x05PIN	2.00	3.20	4.70	4.10
014=2x07PIN	3.00	4.20	5.70	5.10
020=2x10PIN	4.50	5.70	7.20	7.60
030=2x15PIN	7.00	8.20	9.70	9.10
032=2x16PIN	7.50	8.70	10.20	9.60
036=2x18PIN	8.50	9.70	11.20	10.60
040=2x20PIN	9.50	10.70	12.20	11.60
050=2x25PIN	12.00	13.20	14.70	14.10
060=2x30PIN	14.50	15.70	17.20	16.60
080=2x40PIN	19.50	20.70	22.20	21.60

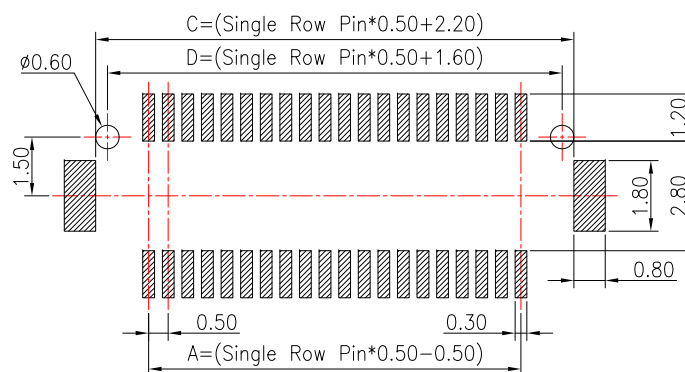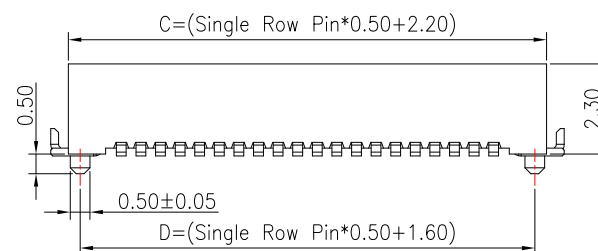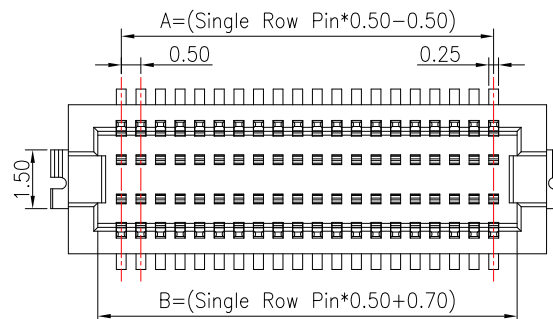

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLERANCE±0.05

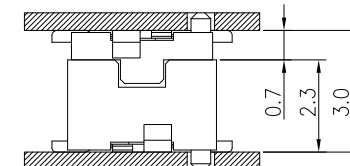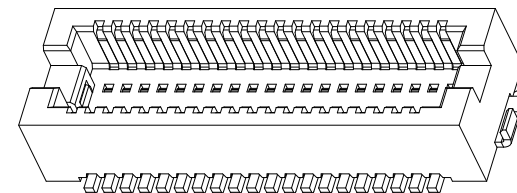

MATING HEIGHT

					OPERATION		DRAW		WLY		2021.11.18		SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X	±0.40	DESIGN		Jensen		2021.11.18					
					X.XX	±0.25	CHECK		Jack		2021.11.18		SIZE	A4	PART NO.	66A1-FXXXXX023R01
A0		NEW			X.XXX	±0.15	APPROVE		Andy		2021.11.18		SHEET	1/1	TITLE:	0.50mm BTB 母座 立式180° SMT 带柱 带接地片
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.		DRAW NO.	SP-593		

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP BLACK,UL94V-0.
- 1.2 CONTACT: PHOSPHOR COPPER.
GOLD (SEE P/N) PLATED,
50u" MIN. NICKEL UNDERPLATED OVER ALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING: 0.3 A.
- 2.2 VOLTAGE RATING: 50 V AC.
- 2.3 CONTACT RESISTANCE: 50mΩ MAX.
- 2.4 INSULATION RESISTANCE: 500MΩ MIN.
- 2.5 WITHSTANDING VOLTAGE: 150V AC/1MINUTE.
- 2.6 OPERATION TEMPERATURE:-55°C TO +125°C.

3.ORDER INFORMATION:

66A1-M XXX XX 022 R 01

Pin数码

010=2*05PIN

~

080=2*40PIN

端子电镀:

G0=Gold Flash

G1=1u" Gold

G2=3u" Gold

G3=5u" Gold

G4=10u" Gold

G5=15u" Gold

G6=30u" Gold

塑胶高度:




022=2.20mm

包装方式:

R=REEL




TABLE1:

No. OF PIN	A	B	C	D
010=2x05PIN	2.00	3.60	4.60	4.10
014=2x07PIN	3.00	4.60	5.60	5.10
020=2x10PIN	4.50	5.10	7.10	7.60
030=2x15PIN	7.00	8.60	9.60	9.10
032=2x16PIN	7.50	9.10	10.10	9.60
036=2x18PIN	8.50	10.10	11.10	10.60
040=2x20PIN	9.50	11.10	12.10	11.60
050=2x25PIN	12.00	13.60	14.60	14.10
060=2x30PIN	14.50	16.10	17.10	16.60
080=2x40PIN	19.50	21.10	22.10	21.60

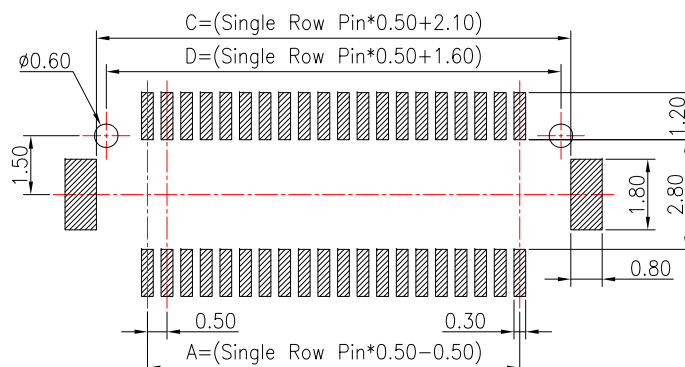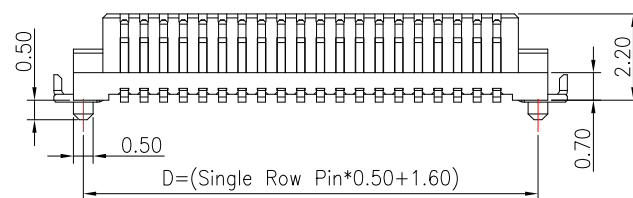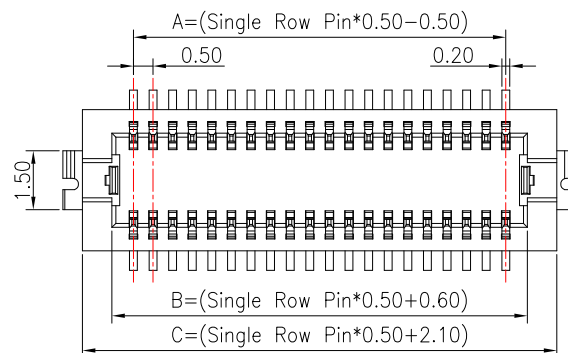

RECOMMENDED PCB LAYOUT(TOP SIDE)

PCB BOARD TOLERANCE±0.05

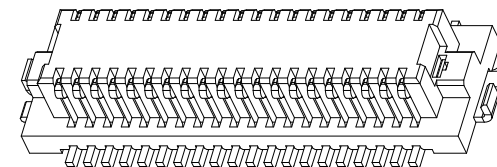

MATING HEIGHT

					OPERATION		DRAW		WLY		2021.11.18		SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X	±0.40	DESIGN		Jensen		2021.11.18					
					X.XX	±0.25	CHECK		Jack		2021.11.18		SIZE	A4	PART NO.	66A1-MXXXXX022R01
A0		NEW			X.XXX	±0.15	APPROVE		Andy		2021.11.18		SHEET	1/1	TITLE:	0.50mm BTB 公头 立式180° SMT 带柱 带接地片
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.		DRAW NO.	SP-594		