

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP BLACK,UL94V-0.
- 1.2 CONTACT: BeCu,GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA,50u" MIN. NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING: 2 A PER PIN(2 PINS POWERED).
- 2.2 VOLTAGE RATING: 225V AC/318V DC.
- 2.3 OPERATION TEMPERATURE:-55°C TO +125°C.

3.BURR ALLOWANCE: 0.038 Max.

4.MINIMUM PUSHOUT FORCE: 2.22N.

5.-TR PACKAGING NOT AVAILABLE ON THE 100POSITION.

-TY PACKAGING ONLY AVAILABLE ON-100 POSITION.

6.ORDER INFORMATION:

66C4-F XXX XX XXX R 01

Pin数码

010=2*5PIN
.....

端子电镀:

S0=Gold Flash/Tin
S1=1u" Gold/Tin
S2=3u" Gold/Tin
S3=5u" Gold/Tin
S4=10u" Gold/Tin
S6=30u" Gold/Tin

塑胶高度:





051=5.10mm("E")
070=7.00mm("E")
090=9.00mm("E")

包装方式:




R=载带包装

TABLE1:

No. OF PIN	A	B	C	D
010=2x5PIN	8.32	10.00	6.80	3.20
020=2x10PIN	12.32	14.00	10.80	7.20
030=2x15PIN	16.32	18.00	14.80	11.20
040=2x20PIN	20.32	22.00	18.80	15.20
050=2x25PIN	24.32	26.00	22.80	19.20
060=2x30PIN	28.32	30.00	26.80	23.20
080=2x40PIN	36.32	38.00	34.80	31.20
100=2x50PIN	44.32	46.00	42.80	39.20
120=2x60PIN	52.32	54.00	50.80	47.20
160=2x80PIN	68.32	70.00	66.80	63.20
200=2x100PIN	84.32	86.00	82.80	79.20

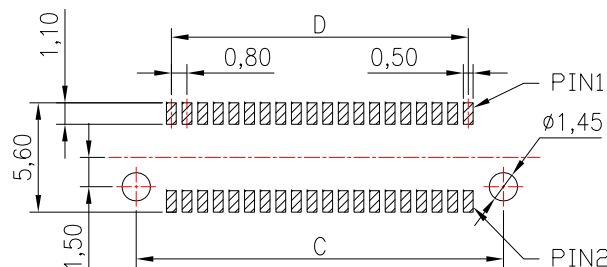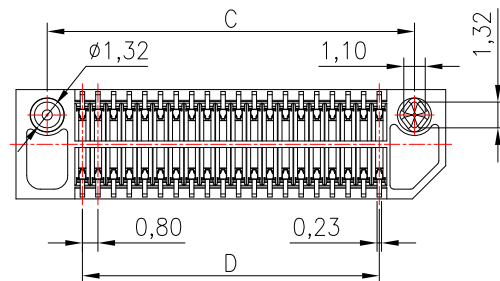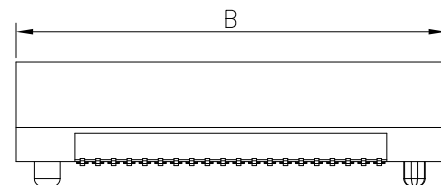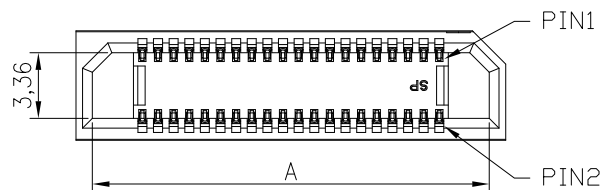

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05

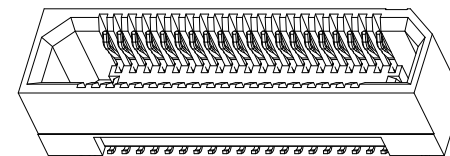

E	F	G	"H" MATING HEIGHT
5.10	5.40	1.60	7.00
		4.60	10.00
		7.60	13.00
		8.60	14.00
7.00	7.20	14.60	20.00
		1.60	9.00
		4.60	12.00
		7.60	15.00
9.00	9.20	8.60	16.00
		14.60	22.00
		1.60	11.00
		4.60	14.00
		7.60	17.00
		8.60	18.00
		14.60	24.00

OPERATION

X.X ±0.40

X.XX ±0.25

X.XXX ±0.15

Angle ±3°

DIM. TOL

DRAW

DESIGN

CHECK

APPROVE

UNIT

mm

WLY

Jensen

Jack

Andy

SCALE

1:1

2017.03.20

2017.03.20

2017.03.20

2017.03.20

SOLEPIN 东莞市硕品电子有限公司
Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.

SIZE A4 PART NO. 66C4-FXXXXXXXR01

SHEET 1/1 TITLE: 0.80mm BTB 母座直立式 SMT

PROJ. DRAW NO. SP-526

AO

REV

1 2 3 4 5 6 7 8 9 10

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP BLACK,UL94V-0.
- 1.2 CONTACT: BeCu,GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA,50u" MIN. NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING: 2 A PER PIN(2 PINS POWERED).
- 2.2 VOLTAGE RATING: 225V AC/318V DC.
- 2.3 OPERATION TEMPERATURE:-55°C TO +125°C.

3.BURR ALLOWANCE: 0.038 Max.

4.MINIMUM PUSHOUT FORCE: 2.22N.

5.-TR PACKAGING NOT AVAILABLE ON THE 100POSITION.

-TY PACKAGING ONLY AVAILABLE ON-100 POSITION.








6.ORDER INFORMATION:

66C4-M XXX XX XXX R 01

Pin数码	端子电镀:	塑胶高度:	包装方式:
010=2*5PIN	S0=Gold Flash/Tin	059=5.97mm("E")	R=载带包装
~	S1=1u" Gold/Tin	089=8.97mm("E")	
200=2*100PIN	S2=3u" Gold/Tin	119=11.97mm("E")	
	S3=5u" Gold/Tin	129=12.97mm("E")	
	S4=10u" Gold/Tin	189=18.97mm("E")	
	S6=30u" Gold/Tin		

TABLE1:

No. OF PIN	A	B	C	D
010=2x5PIN	10.00	8.20	6.80	3.20
020=2x10PIN	14.00	12.20	10.80	7.20
030=2x15PIN	18.00	16.20	14.80	11.20
040=2x20PIN	22.00	20.20	18.80	15.20
050=2x25PIN	26.00	24.20	22.80	19.20
060=2x30PIN	30.00	28.20	26.80	23.20
080=2x40PIN	38.00	36.20	34.80	31.20
100=2x50PIN	46.00	44.20	42.80	39.20
120=2x60PIN	54.00	52.20	50.80	47.20
160=2x80PIN	70.00	68.20	66.80	63.20
200=2x100PIN	86.00	84.20	82.80	79.20

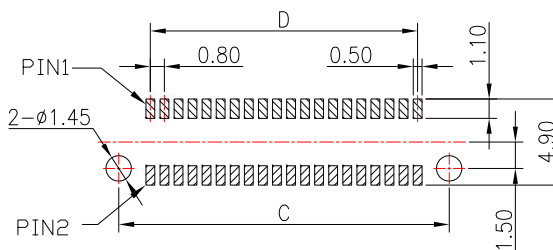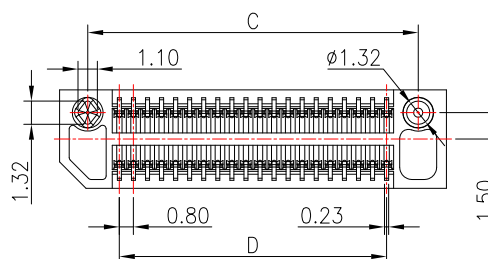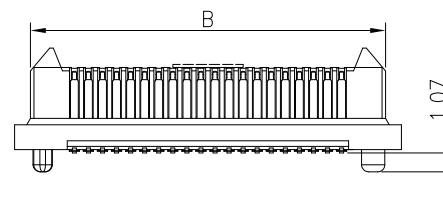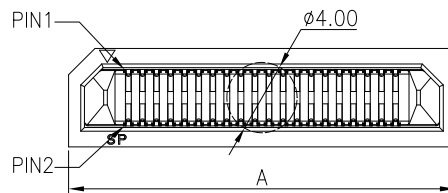

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05

E	F	G	"H" MATING HEIGHT
5.97	1.60	5.40	7.00
		7.20	9.00
		9.20	11.00
8.97	4.60	5.40	10.00
		7.20	12.00
		9.20	14.00
11.97	7.60	5.40	13.00
		7.20	15.00
		9.20	17.00
12.97	8.60	5.40	14.00
		7.20	16.00
		9.20	18.00
18.97	14.60	5.40	20.00
		7.20	22.00
		9.20	24.00

					OPERATION		DRAW		WLY		2017.03.20		SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X	±0.40	DESIGN		Jensen		2017.03.20					
					X.XX	±0.25	CHECK		Jack		2017.03.20		SIZE	A4	PART NO.	66C4-MXXXXXXXR01
A0		NEW			X.XXX	±0.15	APPROVE		Andy		2017.03.20		SHEET	1/1	TITLE:	0.80mm BTB 公头直立式 SMT
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.		DRAW NO.	SP-364		
					Angle	±3°										