

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP BLACK,UL94V-0.
- 1.2 CONTACT: PHOSPHOR BRONZE,GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN

2. ELECTRICAL:

- 2.1 CURRENT RATING: 2 A PER PIN(2 PINS POWERED).
- 2.2 OPERATION TEMPERATURE:-55°C TO +125°C.

3.BURR ALLOWANCE: 0.038 Max.

4.MINIMUM PUSHOUT FORCE: 2.22N.

5.-TR PACKAGING NOT AVAILABLE ON THE 100POSITION.

. -TY PACKAGING ONLY AVAILABLE ON-100 POSITION.

6.PART NO:

66A3-M XXX XX XXX T 01








Pin No. G0=Gold Flash LEAD STYLE:
040=2*20PIN S4=10u" Gold/Tin 025=3.95mm
..... 030=4.45mm
040=5.45mm

TABLE1:

No. OF PIN	A	B	C	D
010=2x5PIN	7.30	4.40	2.00	4.50
020=2x10PIN	9.80	6.90	4.50	7.00
040=2x20PIN	14.80	11.90	9.50	12.00
060=2x30PIN	19.80	16.90	14.50	17.00
080=2x40PIN	24.80	21.90	19.50	22.00
100=2x50PIN	29.80	26.90	24.50	27.00
120=2x60PIN	34.80	31.90	29.50	32.00
130=2x65PIN	37.30	34.40	32.00	34.50
140=2x70PIN	39.80	36.90	34.00	37.00
150=2x75PIN	42.30	39.40	37.00	39.50

TABLE2:

LEAD STYLE	025	030	040
025	5.0MM	--	--
030	5.5MM	6.0MM	--
040	6.5MM	7.0MM	8.0MM

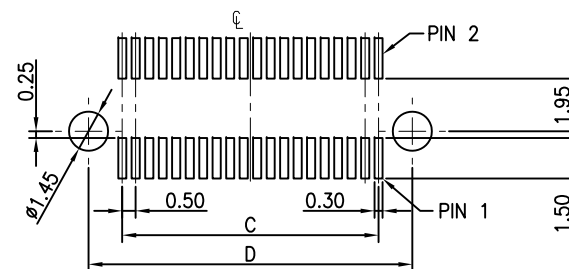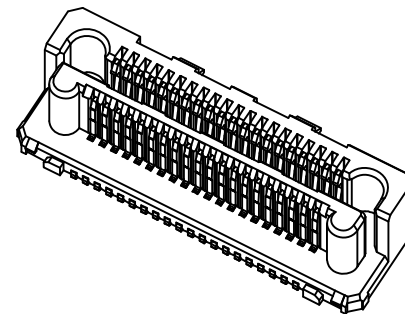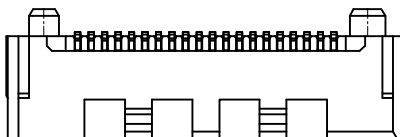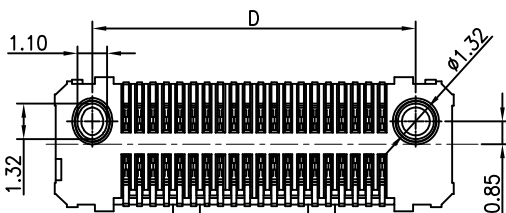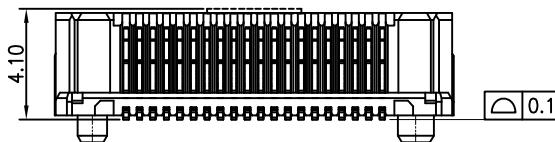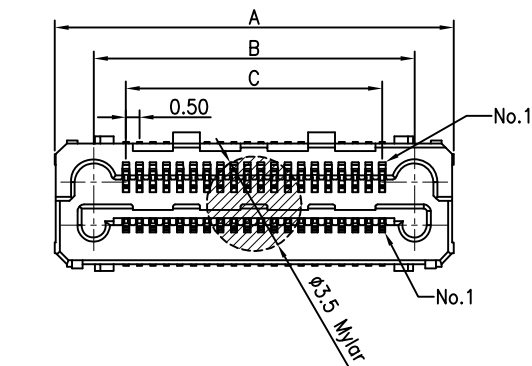

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCE±0.05

OPERATION	DRAW	WLY	2019.08.24
X.X ±0.30	DESIGN	Jensen	2019.08.24
X.XX ±0.20	CHECK	Jack	2019.08.24
X.XXX ±0.10	APPROVE	Andy	2019.08.22
Angle ±3°	UNIT	mm	SCALE 1:1
DIM. TOL			

SOLEPIN 东莞市硕品电子有限公司
Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
AO		NEW		

SIZE	A4	PART NO.	66A3-MXXXXXXXXT01
SHEET	1/1	TITLE:	0.50mm BTB CONNECTOR
PROJ.	SP-396	DRAW NO.	