





客户图

NOTES:

1. FINISH:
 - 1.1 HOUSING: POLYESTER, UL94 V-0.
 - 1.2 CONTACT: BRASS, GOLD (SEE P/N) PLATED OVER IN CONTACT AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.
2. ELECTRICAL:
 - 2.1 VOLTAGE RATING: 100V, AC/DC.
 - 2.2 CURRENT RATING: 1.0 AMP, AC/DC.
 - 2.3 DIELECTRIC WITHSTAND VOLTAGE: 500V, AC/MINUTE
 - 2.4 CONTACT RESISTANCE: 20 MΩ MAX
 - 2.5 INSULATION RESISTANCE: 1000 MΩ MIN
3. OPERATING TEMP RANGE: -40 °C to +105 °C
4. ORDER INFORMATION:

67F4-R XXX G0 056 X 01

Pin数	端子电镀:	塑胶高度:	包装方式:
020=2*10PIN	G0=Gold Flash	056=5.60mm	T=TUBE
~	G1=1u" Gold		A=Tray
120=2*60PIN	G2=3u" Gold		
	G3=5u" Gold		
	G4=10u" Gold		
	G5=15u" Gold		
	G6=30u" Gold		

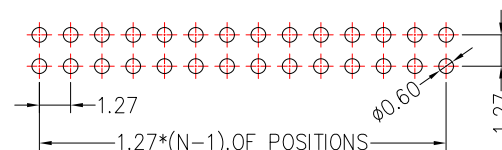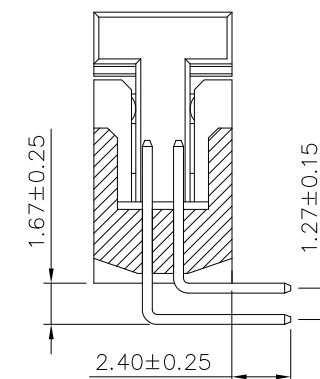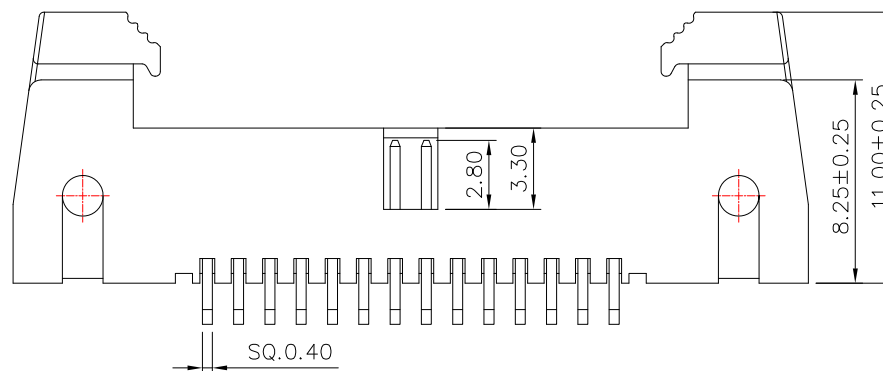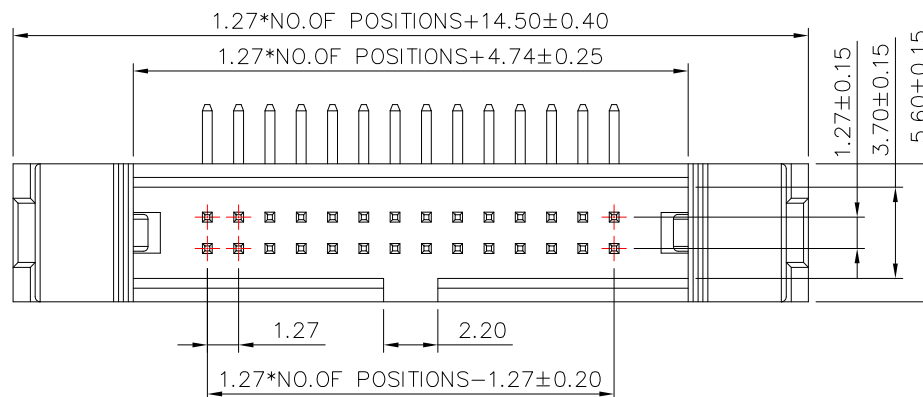




Recommended P.C.B Layout
P.C.B Board Tolerance ± 0.05

					OPERATION		DRAW		WLY		2019.06.18		SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.				
					X.X	±0.40	DESIGN		Jensen		2019.06.18						
					X.XX	±0.25	CHECK		Jack		2019.06.18						
					X.XXX	±0.15	APPROVE		Andy		2019.06.18						
A0		NEW		_____	_____	Angle	±3°					SHEET	1/1	TITLE:		1.27mm Ejector Header,H=8.25,90°DIP	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.		DRAW NO.		SP-697	

A
—
B
—
C
—
D
—
E
—
F
—
G
—
H

1. FINISH:
 - 1.1 HOUSING: POLYESTER, UL94 V-0.
 - 1.2 CONTACT: BRASS,
GOLD (SEE P/N) PLATED OVER IN CONTACT AREA,
50u" MIN. NICKEL UNDERPLATED OVERALL.
2. ELECTRICAL:
 - 2.1 VOLTAGE RATING: 100V, AC/DC.
 - 2.2 CURRENT RATING: 1.0 AMP, AC/DC.
 - 2.3 DIELECTRIC WITHSTAND VOLTAGE: 500V, AC/MINUTE
 - 2.4 CONTACT RESISTANCE: 20 MΩ MAX
 - 2.5 INSULATION RESISTANCE: 1000 MΩ MIN
3. OPERATING TEMP RANGE: -40 °C to +105 °C
4. ORDER INFORMATION:

67F4-S XXX GO 110 X 01			
Pin数	端子电镀:	塑胶高度:	包装方式:
020=2*10PIN	G0=Gold Flash	110=11.0mm	T=TUBE
~	G1=1u" Gold		C=Tray
120=2*60PIN	G2=3u" Gold		
	G3=5u" Gold		
	G4=10u" Gold		
	G5=15u" Gold		
	G6=30u" Gold		

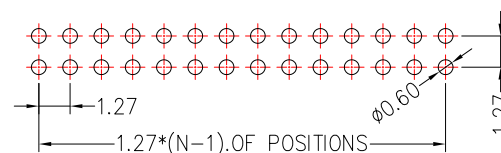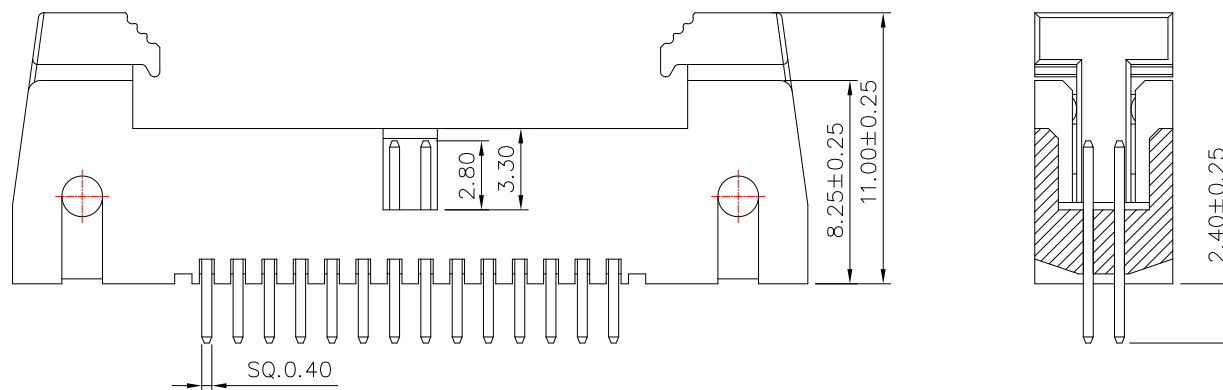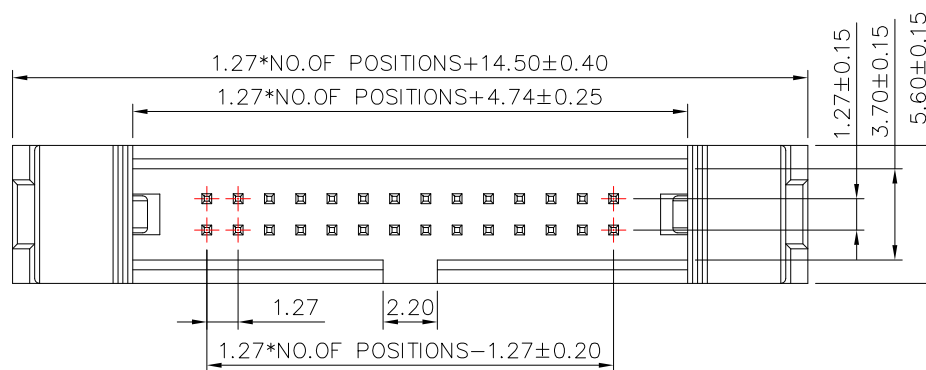

Recommended P.C.B Layout
P.C.B Board Tolerance ± 0.05

					OPERATION		DRAW		WLY		2019.06.18		 SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X	±0.40	DESIGN		Jensen		2019.06.18					
					X.XX	±0.25	CHECK		Jack		2019.06.18		SIZE	A4	PART NO.	67F4-SXXXG0110X01
A0		NEW	_____	_____	X.XXX	±0.15	APPROVE		Andy		2019.06.18		SHEET	1/1	TITLE:	1.27mm EJECTOR HEADER,H=8.25,180°DIP
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.		DRAW NO.	SP-696	





客户图

NOTES:

- FINISH:
 - HOUSING: POLYESTER, UL94 V-0.
 - CONTACT: BRASS, GOLD (SEE P/N) PLATED OVER IN CONTACT AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.
- ELECTRICAL:
 - VOLTAGE RATING: 100V, AC/DC.
 - CURRENT RATING: 1.0 AMP, AC/DC.
 - DIELECTRIC WITHSTAND VOLTAGE: 500V, AC/MINUTE
 - CONTACT RESISTANCE: 20 MΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN
- OPERATING TEMP RANGE: -40 °C to +105 °C
- ORDER INFORMATION:

67F4-S XXX GO 110 X 02

Pin数	端子电镀:	塑胶高度:	包装方式:
020=2*10PIN	G0=Gold Flash	110=11.0mm	T=TUBE
~	G1=1u" Gold		C=Tray
120=2*60PIN	G2=3u" Gold		
	G3=5u" Gold		
	G4=10u" Gold		
	G5=15u" Gold		
	G6=30u" Gold		

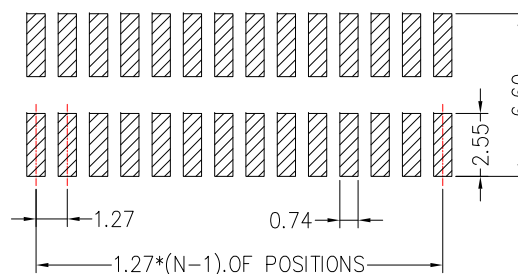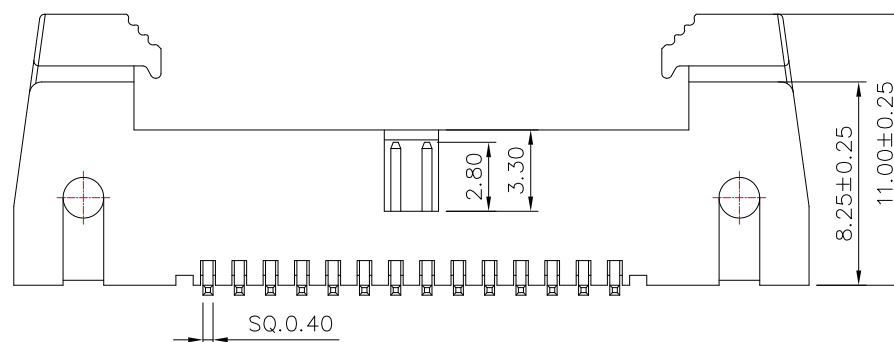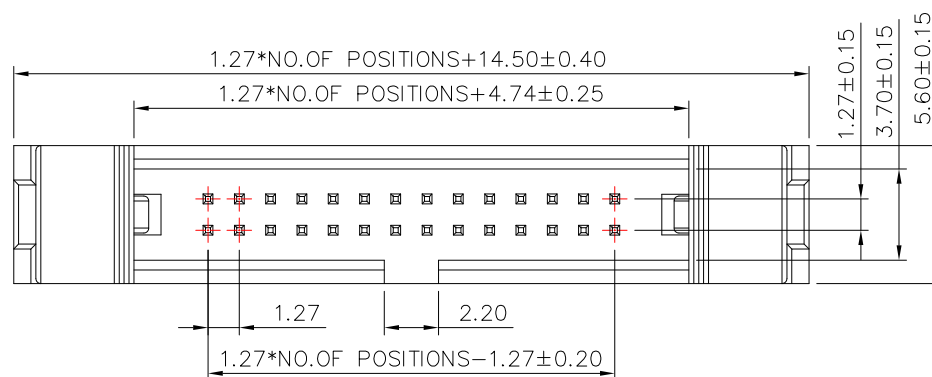

Recommended P.C.B Layout
P.C.B Board Tolerance±0.05

					OPERATION	DRAW	WLY	2019.06.18	SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X ±0.40	DESIGN	Jensen	2019.06.18				
					X.XX ±0.25	CHECK	Jack	2019.06.18				
					X.XXX ±0.15	APPROVE	Andy	2019.06.18				
A0		NEW			Angle ±3°				SHEET	1/1	TITLE:	1.27mm EJECTOR HEADER,H=8.25,180°SMT
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM. TOL	UNIT	mm	SCALE	1:1	PROJ.	DRAW NO.	SP-698