

客户图


NOTES:

1. FINISH:
 - 1.1 HOUSING: LCP BLACK,UL94V-0.
 - 1.2 CONTACT: PHOSPHOR COPPER.
GOLD (SEE P/N) PLATED,
50u" MIN. NICKEL UNDERPLATED OVER ALL.
2. ELECTRICAL:
 - 2.1 CURRENT RATING: 3 A.
 - 2.2 VOLTAGE RATING: 500 V AC.
 - 2.3 CONTACT RESISTANCE: 20mΩ MAX.
 - 2.4 INSULATION RESISTANCE: 1000MΩ MIN.
 - 2.5 WITHSTANDING VOLTAGE: 150V AC/1MINUTE.
 - 2.6 OPERATION TEMPERATURE:-45°C TO +105°C.

3.ORDER INFORMATION:


66H6-M XXX XX XXX R XX

Pin 数码 端子电镀: 塑胶高度: H1 插件方式
 010=2*05PIN G0=Gold Flash 084=8.40mm 01=TYPE-01
 ~ G1=1u" Gold 119=11.90mm 02=TYPE-02
 060=2*30PIN G2=3u" Gold
 G3=5u" Gold
 G4=10u" Gold






RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05

TYPE-01

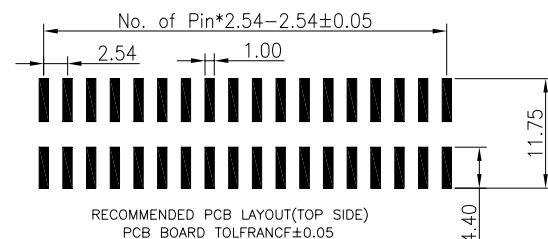


RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05

TYPE-02

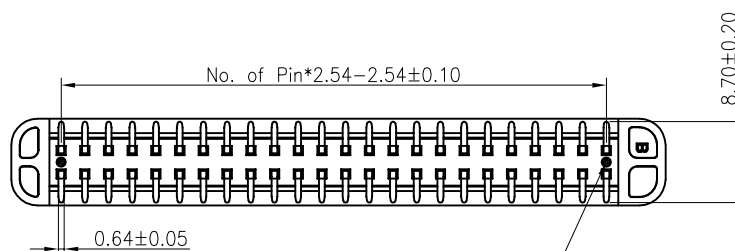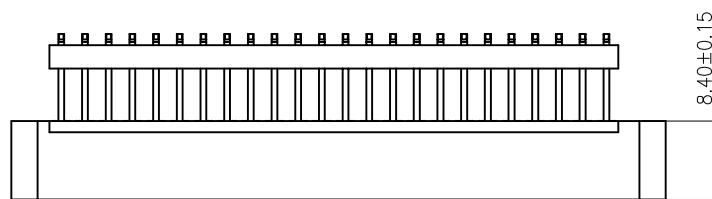
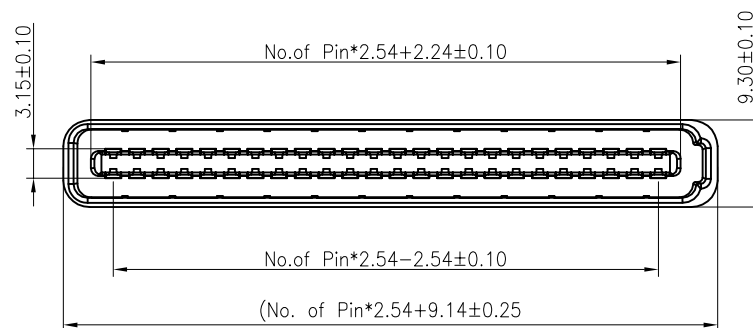


定位柱可以按照需求做调整


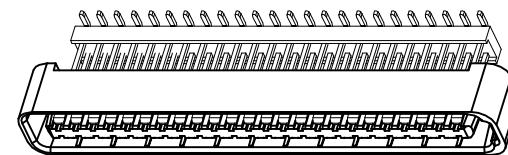


TYPE-01

TYPE-02



H2= 11.5~36.5mm



TYPE-01

TYPE-02

					OPERATION		DRAW		WLY		2021.11.18		SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X	±0.40	DESIGN		Jensen		2021.11.18					
					X.XX	±0.25	CHECK		Jack		2021.11.18		SIZE	A4	PART NO.	66H6-MXXXXXXXR01
					X.XXX	±0.15	APPROVE		Andy		2021.11.18		SHEET	1/1	TITLE:	2.54mm BTB 公座 SMT
A0			NEW	——	Angle	±3'										
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.		DRAW NO.	SP-901	

客户图






NOTES:

1. FINISH:
 - 1.1 HOUSING: LCP BLACK,UL94V-0.
 - 1.2 CONTACT: PHOSPHOR COPPER.
GOLD (SEE P/N) PLATED,
50u" MIN. NICKEL UNDERPLATED OVER ALL.
2. ELECTRICAL:
 - 2.1 CURRENT RATING: 3 A.
 - 2.2 VOLTAGE RATING: 500 V AC.
 - 2.3 CONTACT RESISTANCE: 20mΩ MAX.
 - 2.4 INSULATION RESISTANCE: 1000MΩ MIN.
 - 2.5 WITHSTANDING VOLTAGE: 150V AC/1MINUTE.
 - 2.6 OPERATION TEMPERATURE:-45°C TO +105°C.


3.ORDER INFORMATION:

66H6-F XXX XX XXX R 01

Pin 数码 端子电镀: 塑胶高度: 包装方式:
010=2*05PIN G0=Gold Flash 089=8.90mm R=REEL
~ G1=1u" Gold
060=2*30PIN G2=3u" Gold
 G3=5u" Gold
 G4=10u" Gold

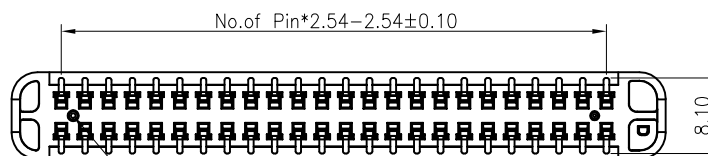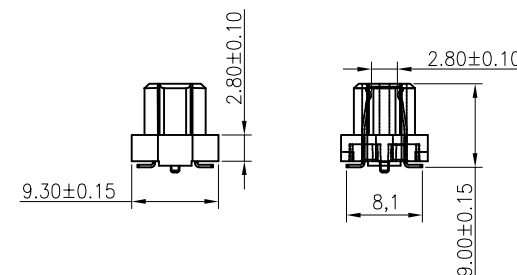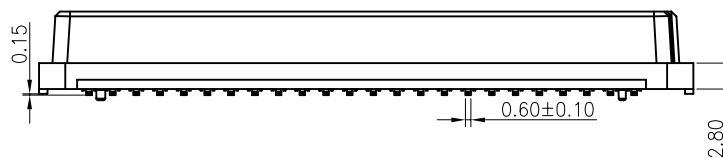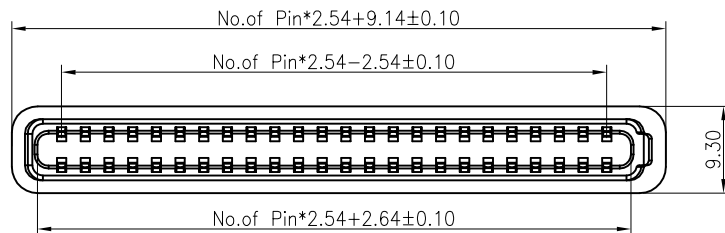

定位柱可以按照需求做调整

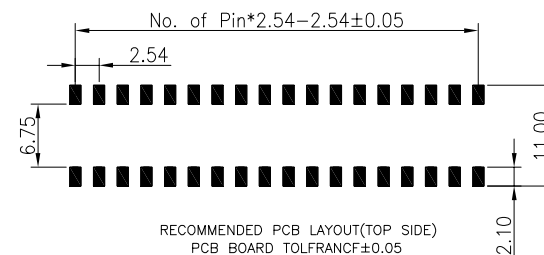

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05

					OPERATION		DRAW	WLY	2021.11.18	SOLEPiN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X	±0.40	DESIGN	Jensen	2021.11.18				
					X.XX	±0.25	CHECK	Jack	2021.11.18				
					X.XXX	±0.15	APPROVE	Andy	2021.11.18				
AO			NEW		Angle	±3°				SHEET	1/1	TITLE:	2.54mm BTB 母座 SMT
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.	DRAW NO. SP-901