

客户图

NOTES:

1. FINISH:

1.1 HOUSING: HIGH TEMPERATURE RESISTANT
THERMOPLASTIC PBT BLACK,UL94V-0.

1.2 CONTACT: GOLD (SEE P/N) PLATED

IN CONTACT AREA, MATTE TIN PLATED IN SOLDER AREA,
50u" MIN. NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 Voltage Rating: 250V,AC/DC
- 2.2 Current Rating: 3.0 AMP,AC/DC
- 2.3 Dielectric Withstand Voltage: 500V,AC/Minute
- 2.4 Contact Resistance: 30 mΩ Max
- 2.5 Insulation Resistance: 1000 mΩ Min
- 2.6 Operation Temperature: -40°C to +105°C

3. ORDER INFORMATION:

8001-F - XXX - XX - XXX - C - 01





信号Pin数

038=09Pin+29Pin
033=09Pin+24Pin

端子电镀:

A/B高度:

G1=1u"Gold/Tin 001=A/B 20.4/31.68
G2=3u"Gold/Tin 002=15.88/27.16
G4=10u"Gold/Tin
SN=TIN

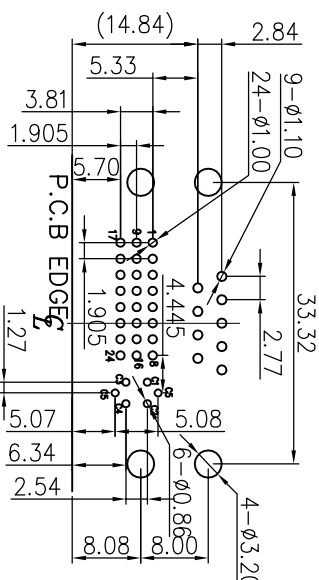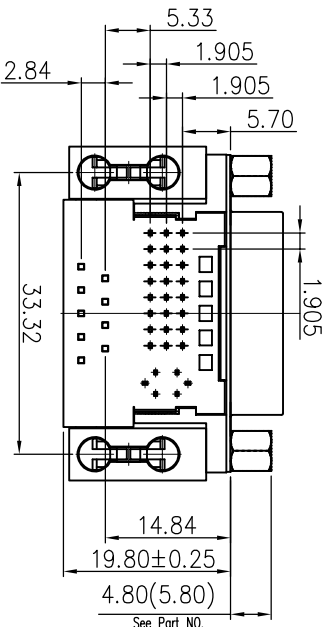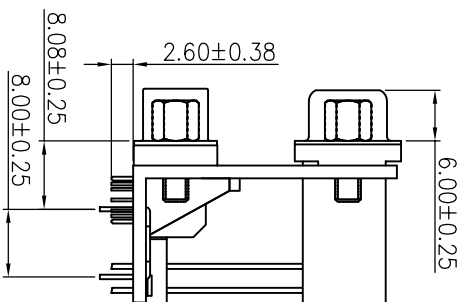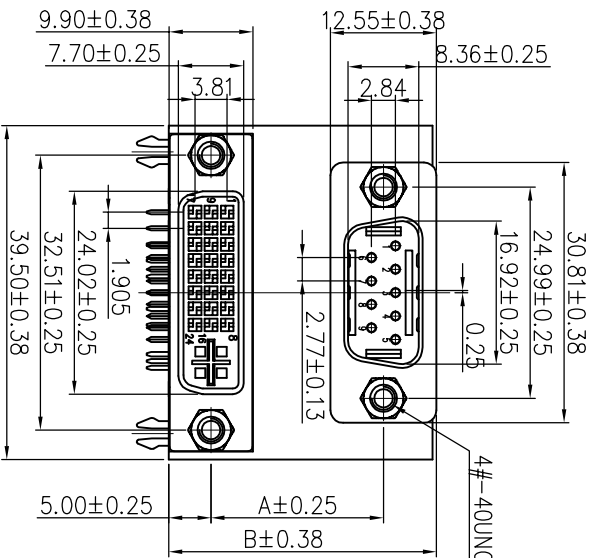

Recommended P.C.B Layout
P.C.B Board Tolerance±0.05

SOLEPIN 东莞市硕品电子有限公司
Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.

				OPERATION		DRAW		W.L.Y		2021.09.23		SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.	SIZE	A4	PART NO.	8001-F-XXX-XX-XXX-C-01
				X.X		DESIGN		Jensen		2021.09.23						
				X.XX		CHECK		Jock		2021.09.23						
				X.XXX		APPROVE		Andy		2021.09.23						
				Angle		±3°						SHEET	1/1	TITLE:		DVI F+DB9 M 90ROW DIP
A0			NEW									PROJ.		DRAW NO.		SP-2008
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1					