

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LP-LCP BLACK 94V-0
- 1.2 CONTACT: H-HIGH CONDUCTIVE BRASS, GOLD (SEE P/N) PLATED IN CONTACT AREA, GOLD FLASH PLATED IN SOLDER AREA, 50u"MIN NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING: 23A AC. DC
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 2200V,AC/Minute
- 2.3 CONTACT RESISTANCE: 10mΩ MAX.
- 2.4 INSULATION RESISTANCE: 1000 mΩ Min
- 2.5 Operation Temperature: -40°C to +105°C

3. SALT SPRAY TEST:

- 3.1 CONCENTRATION IS 5%, THE TEMPERATURE IS 35±2°C, TEST TIME 8H MIN, NO OXIDATION OR RUST








4. Max Processing Temp: 265°C Seconds 40S

5. ORDER INFORMATION:

5700-S XXX SX 148 E 01

Pin数	端子电镀:	塑胶高度:	包装方式:
002=2*01PIN	SN=Tin	148=14.80mm	T=TUBE
~	S1=1u" Gold/Tin		P=TUBE+CAP
012=2*06PIN	S2=3u" Gold/Tin		R=TAPE REEL
	S3=5u" Gold/Tin		E=PE袋
	S4=10u" Gold/Tin		C=TRAY
	S5=15u" Gold/Tin		
	S6=30u" Gold/Tin		

Poles	Dimensions (mm)		
	A	B	C
2*01	8.35	5.70	12.34
2*02	12.05	5.70	16.04
2*03	17.75	11.40	21.74
2*04	23.45	17.10	27.44
2*05	29.15	22.80	33.14
2*06	34.85	28.50	38.84

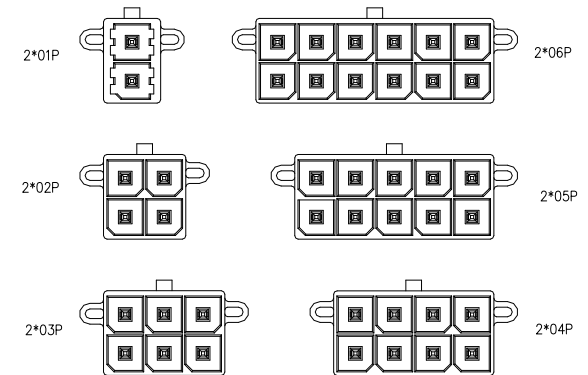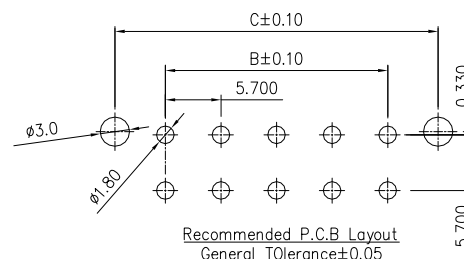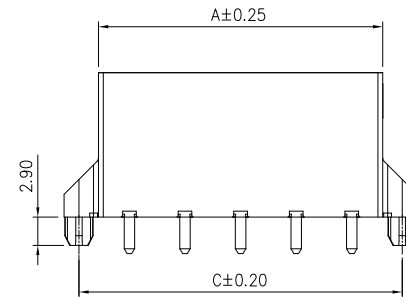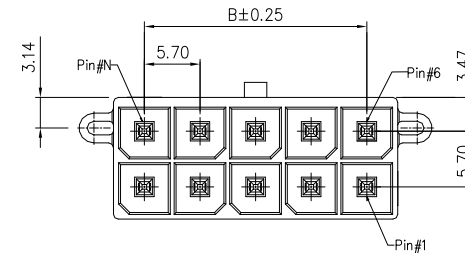

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW		WLY		SOLEPIN 东莞市硕品电子有限公司		
					DIM.	TOL	DESIGN	CHECK	SCALE	1:1	Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.		
					X.X	±0.45	DESIGN	Jensen	2020.10.23	SIZE	A4	PART NO.	5700-SXXXSX148E01
					X.XX	±0.25	CHECK	Jack	2020.10.23	SHEET	1/1	TITLE:	5.70 mm Crimp Style Connectors
					X.XXX	±0.15	APPROVE	Andy	2020.10.23	PROJ.	☞	DRAW NO.	SP-1055
AO		NEW			Angle	±3°							

客户图






- NOTES:
- FINISH:
 - HOUSING: PA66 BLACK 94V-0
 - ELECTRICAL:
 - CURRENT RATING: 23A max AC. DC
 - DIELECTRIC WITHSTANDING VOLTAGE: 2200V,AC/Minute
 - CONTACT RESISTANCE: 5mΩ MAX.
 - INSULATION RESISTANCE: 1000 mΩ Min
 - Operation Temperature: -40°C to +105°C
 - SALT SPRAY TEST:
 - CONCENTRATION IS 5%, THE TEMPERATURE IS 35±2°C, TEST TIME 8H MIN, NO OXIDATION OR RUST
 - Max Processing Temp: 265°C Seconds 40S
 - ORDER INFORMATION:

5700-H XXX 249 X 01


Pin数
002=2*01PIN
~
012=2*06PIN

塑胶高度:
249=24.90mm


包装方式:
T=TUBE
P=TUBE+CAP
R=TAPE REEL
E=PE袋
C=TRAY

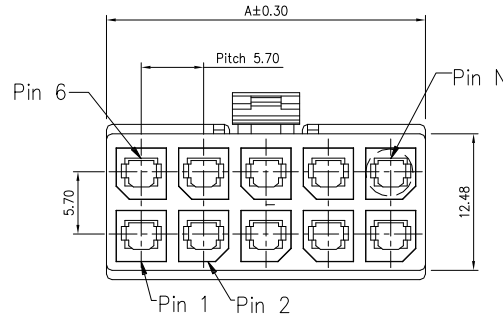


2x01P




2x02P




2x03P



2x04P



2x05P



2x06P

Poles	Dimensions (mm)	
	A	
2*01	8.35	
2*02	12.05	
2*03	17.75	
2*04	23.45	
2*05	29.15	
2*06	34.85	

					OPERATION	DRAW	WLY	2020.10.23	SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.				
					X.X ±0.40	DESIGN	Jensen	2020.10.23					
					X.XX ±0.25	CHECK	Jack	2020.10.23					
					X.XXX ±0.15	APPROVE	Andy	2020.10.23					
AO		NEW			Angle ±3°				SHEET	1/1	TITLE:	5.70mm Crimp Style Connectors	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.	DRAW NO.	SP-1063

客户图

NOTES:

1. FINISH:

- 1.1 CONTACT: BRASS, GOLD (SEE P/N) PLATED IN CONTACT AREA, GOLD FLASH PLATED IN SOLDER AREA, 50u"MIN NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING: Table
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 2200V,AC/Minute
- 2.3 CONTACT RESISTANCE: 5mΩ MAX.
- 2.4 INSULATION RESISTANCE: 1000 mΩ Min
- 2.5 Operation Temperature: -40°C to +105°C
- 2.6 Wire Range: AWG#12-16

3. SALT SPRAY TEST:

- 3.1 CONCENTRATION IS 5%, THE TEMPERATURE IS 35±2°C, TEST TIME 8H MIN, NO OXIDATION OR RUST

4. Max Processing Temp: 265°C Seconds 40S

5. ORDER INFORMATION:

5700-T SX 01

端子电镀:





SN=Tin

S1=1u" Gold/Tin

S2=3u" Gold/Tin

S3=5u" Gold/Tin

Current rating					
AWG & Metric wire size	Ckt. Size	2	4	6	8-12
12 AWG, 4.0mm ²	21 A	18 A	16 A	14 A	14 A
14 AWG, 2.5mm ²	19 A	15 A	13 A	11 A	11 A
16 AWG, 1.5mm ²	15 A	13 A	11 A	10 A	10 A

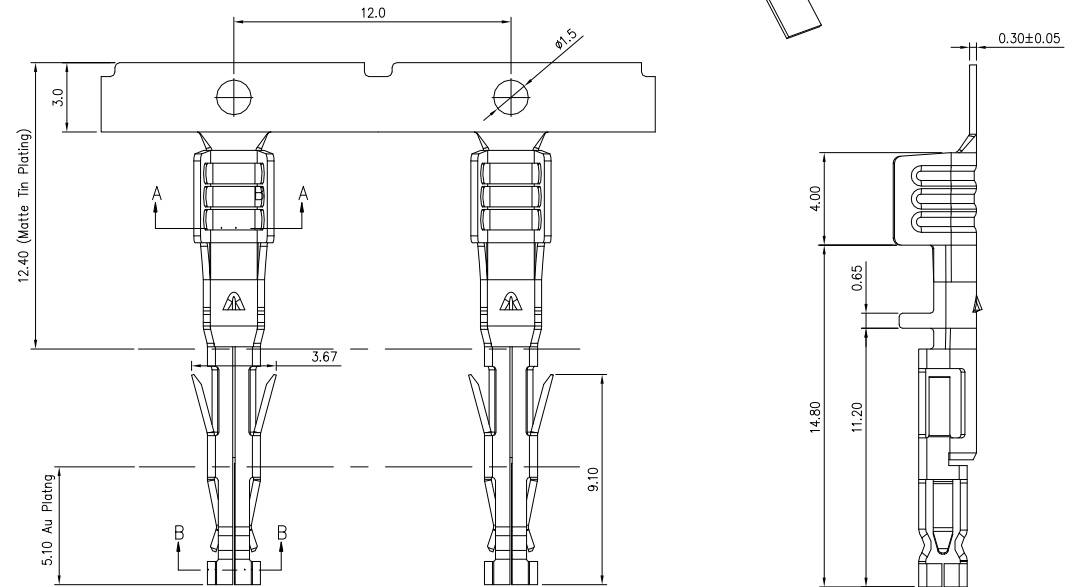

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.	SIZE	A4	PART NO.	5700-TSN01
AO		NEW			Angle	±3°	APPROVE	Andy	2020.10.23			SHEET	1/1	TITLE:	5.70mm Crimp Style Connectors
												PROJ.	☯	DRAW NO.	SP-1063

SOLEPIN 东莞市硕品电子有限公司
Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.