






客户图

- NOTES:
- FINISH:
 - HOUSING: LCP BLACK,UL94V-0.
 - CONTACT: BRASS,GOLD (SEE P/N) PLATED IN CONTACT AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.
 - GROUND: BRASS,80u" MIN. MATTE TIN PLATED OVER 50u" MIN. NICKEL UNDERPLATED OVERALL.
 - ELECTRICAL:
 - CURRENT RATING:7A;
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V.
 - CONTACT RESISTANCE: 20mΩ MAX.
 - INSULATION RESISTANCE: 500MΩ MIN.
 - OPERATION TEMPERATURE:-40°C TO +105°C.

3.ORDER INFORMATION:

72S1-M 008 XX 040 X 01

Pin数码 008=8PIN	端子电镀: G0=Gold Flash(全金) G1=1u" Gold G2=3u" Gold G3=5u" Gold G4=10u" Gold G5=15u" Gold G6=30u" Gold	塑胶高度: 040=4.00mm	包装方式: C=脆盘装 R=载带包装 E=PE袋装
-------------------	---	---------------------	------------------------------------

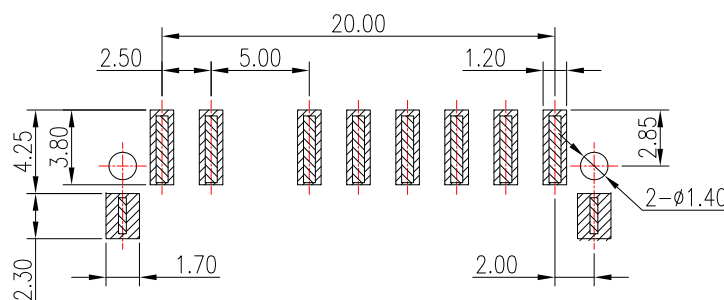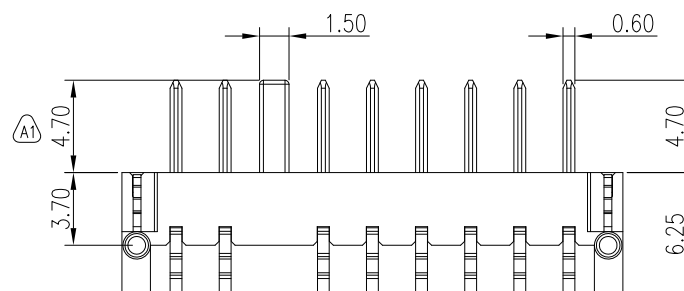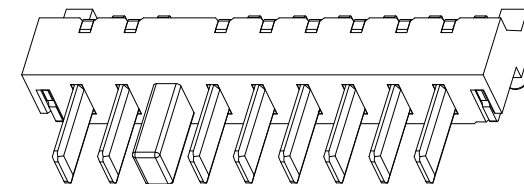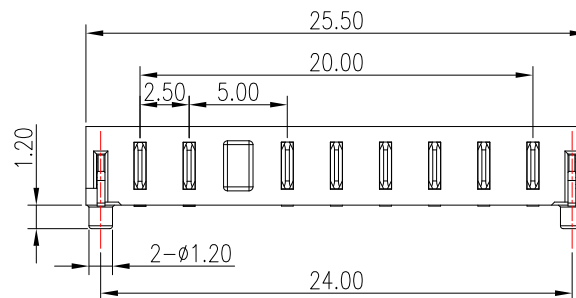

RECOMMENDED PCB LAYOUT
Layout Tolerance±0.05

					OPERATION		DRAW		WLY		2020.12.07		SOLEPiN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.				
					X.X	±0.40	DESIGN		Jensen		2020.12.07						
					X.XX	±0.25	CHECK		Jack		2020.12.07						
A1	2021. 01. 20	防呆柱子由5. 75修改到4. 70		WLY		X.XXX	±0.15	APPROVE		Andy		2020.12.07		SIZE	A4	PART NO.	72S1-M008XX040X01
A0		NEW		_____		Angle	±3°					2020.12.07		SHEET	1/1	TITLE:	PH2. 5mm 电池座公头
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.		DRAW NO.	SP-388		

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP BLACK,UL94V-0.
- 1.2 CONTACT: BRASS,GOLD (SEE P/N) PLATED IN CONTACT AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.
- 1.3 GROUND: BRASS,80u" MIN. MATTE TIN PLATED OVER 50u" MIN. NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING:7A;
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V.
- 2.3 CONTACT RESISTANCE: 20mΩ MAX.
- 2.4 INSULATION RESISTANCE: 500MΩ MIN.
- 2.5 OPERATION TEMPERATURE:-40°C TO +105°C.

3.ORDER INFORMATION:

72S1-F 008 XX 048 X 01

Pin数码
008=8PIN

端子电镀:




G0=Gold Flash(全金)
G1=1u" Gold
G2=3u" Gold
G3=5u" Gold
G4=10u" Gold
G5=15u" Gold
G6=30u" Gold

塑胶高度:



048=4.80mm

包装方式:

C=脆盘装
R=载带包装
E=PE袋装

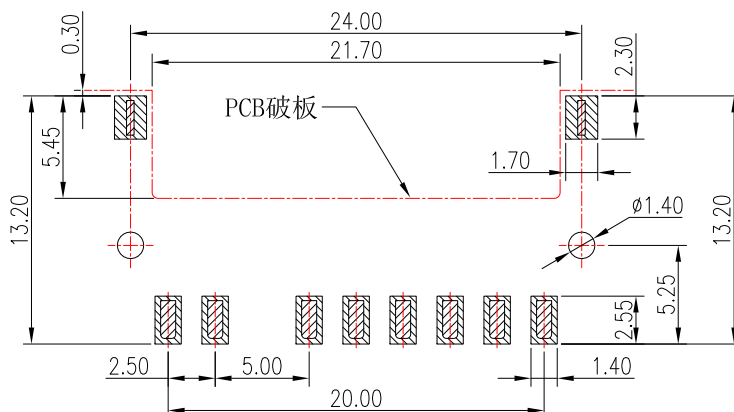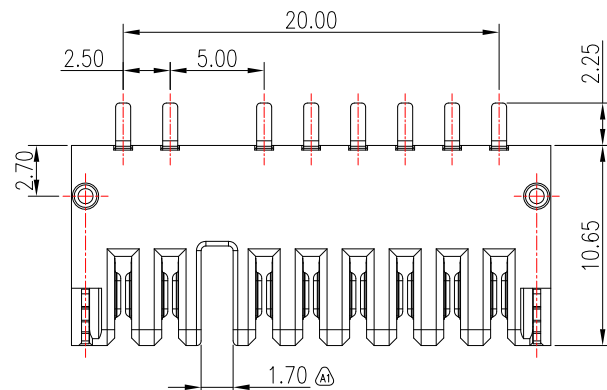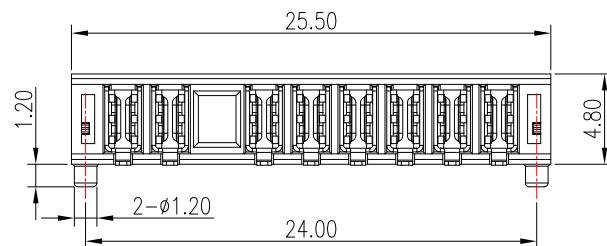

RECOMMENDED PCB LAYOUT
Layout Tolerance±0.05

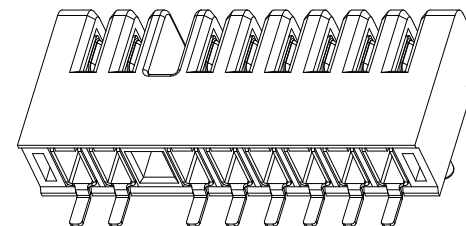

					OPERATION	DRAW	WLY	2021.01.20	SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X ±0.40	DESIGN	Jensen	2021.01.20				
					X.XX ±0.25	CHECK	Jack	2021.01.20				
A1	2021.01.20	防呆槽宽度由1.90修改到1.70	WLY		X.XXX ±0.15	APPROVE	Andy	2021.01.20	SIZE	A4	PART NO.	72S1-F008XX048X01
A0		NEW			Angle ±3°				SHEET	1/1	TITLE:	PH2.5mm 电池座母座
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM. TOL	UNIT	mm	SCALE	1:1	PROJ.	DRAW NO.	SP-389