

客户图

NOTES:

- FINISH:
 - HOUSING: LCP BLACK,UL94V-0.
 - CONTACT: C7025, GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.
- ELECTRICAL:
 - CURRENT RATING:12Amp;
 - DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/DC.
 - CONTACT RESISTANCE: 20mΩ MAX.
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - OPERATION TEMPERATURE:-40°C TO +105°C.
- ALL MATERIALS MUST BE ROHS MATERIALS
- ORDER INFORMATION:






61H6- R2 XXX XX 142 C 01

2.54x5.08mm 90°


Pin数: 050=2*50PIN
 端子电镀: S0=Gold Flash/Tin
 S1=1u" Gold/Tin
 S2=3u" Gold/Tin
 S3=5u" Gold/Tin
 S4=10u" Gold/Tin
 塑胶高度: 2142=14.25mm
 包装方式: C=TRAY

No. OF PIN	A	B	C	D	E
020=2*10PIN	53.35	41.46	41.62	27.90	22.86
022=2*11PIN	55.89	44.00	44.16	30.44	25.40
024=2*12PIN	58.43	46.54	46.70	32.98	27.94
026=2*13PIN	60.97	49.08	49.24	35.52	30.48
028=2*14PIN	63.51	51.62	51.78	38.06	33.02
030=2*15PIN	66.05	54.16	54.32	40.60	35.56
032=2*16PIN	68.59	56.70	56.86	43.14	38.10
034=2*17PIN	71.13	59.24	59.40	45.68	40.64
036=2*18PIN	73.67	61.78	61.94	48.22	43.18
038=2*19PIN	76.21	64.32	64.48	50.76	45.72
040=2*20PIN	78.75	66.86	67.02	53.30	48.26
050=2*25PIN	91.45	79.56	79.72	66.00	60.96
060=2*30PIN	104.15	92.26	92.42	78.70	73.66
064=2*32PIN	109.23	97.34	97.50	83.78	78.74

100=2*50PIN	154.95	143.06	143.22	129.50	124.46

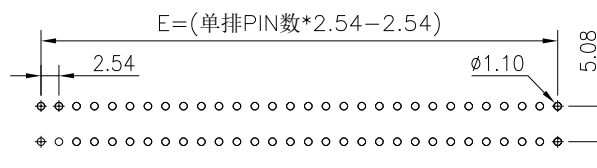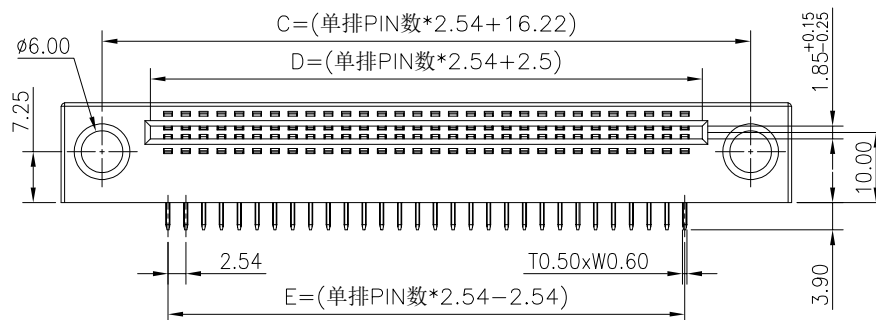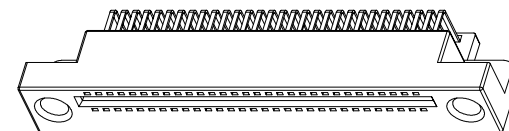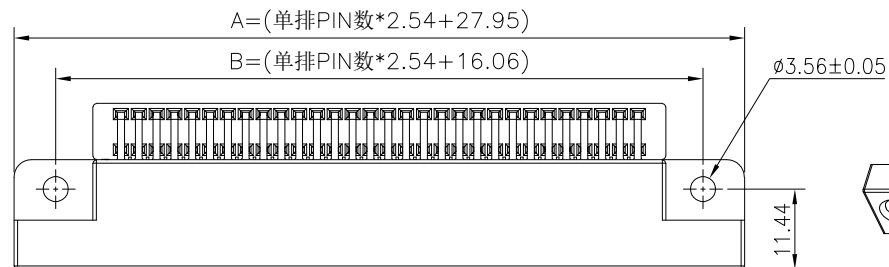

RECOMMENDED PCB LAYOUT(TOP SIDE)
 PCB BOARD TOLERANCE±0.05



					OPERATION		DRAW		WLY		2022.11.24		SOLEPiN 东莞市硕品电子有限公司 PROFESSIONAL CONNECTOR DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X	±0.40	DESIGN		Jensen		2022.11.24					
					X.XX	±0.25	CHECK		Jack		2022.11.24		SIZE	A4	PART NO.	61H6— R2XXXXX142C01
AO		NEW	——	——	X.XXX	±0.15	APPROVE		Andy		2022.11.24		SHEET	1/1	TITLE:	2.54x5.08mm 金手指 DIP 90°
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°										
					DIM.	TOL	UNIT		mm	SCALE	1:1	PROJ.		DRAW NO.	SP-732	