

客户图

NOTES:

1.FINISH:

- 1.1 HOUSING: PPS BLACK, UL94V-0.
- 1.2 CONTACT: COPPER ALLOY, GOLD (SEE P/N) PLATED IN CONTACT AREA, GOLD FLASH PLATED IN SOLDER AREA, 50u"MIN NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING: 4.0 AMP,AC/DC
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 750V,AC/Minute
- 2.3 CONTACT RESISTANCE: 100mΩ MAX.
- 2.4 INSULATION RESISTANCE: 1000 mΩ Min
- 2.5 Operation Temperature:-55°C to +200°C

3.SALT SPRAY TEST:

- 3.1 CONCENTRATION IS 5%, THE TEMPERATURE IS 35±2°C, TEST TIME 8H MIN, NO OXIDATION OR RUST

4.ORDER INFORMATION:






61H9- S XXX XX 156 C 01

180° 直插

Pin数码
SEE TABLE
004=2*2PIN
~
150=2*75PIN

端子电镀:
S1=1u" Gold/Tin
S2=3u" Gold/Tin
S5=15u" Gold/Tin
S6=30u" Gold/Tin

塑胶高度:
156=15.60mm

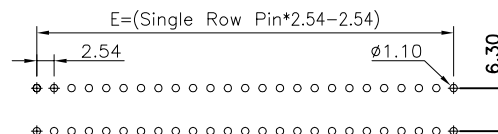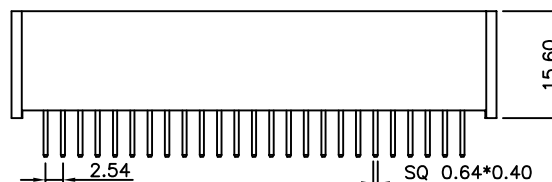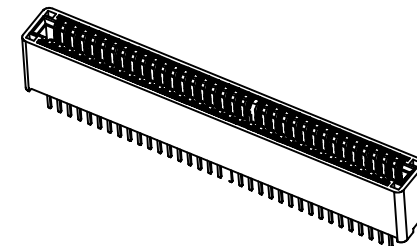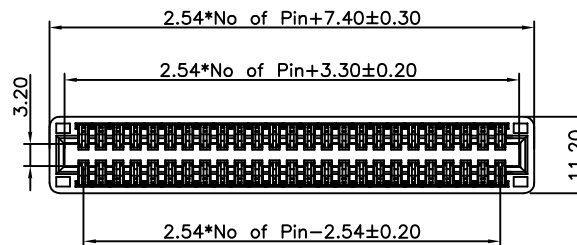

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLERANCE ±0.05

					OPERATION		DRAW	WLY	2023.05.30	SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X	±0.40	DESIGN	Jensen	2023.05.30				
					X.XX	±0.25	CHECK	Jack	2023.05.30				
					X.XXX	±0.15	APPROVE	Andy	2023.05.30				
AO			NEW		Angle	±3°				SHEET	1/1	TITLE:	2.54x5.08mm 金手指 180° 直插
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.	DRAW NO. SP-951

客户图

NOTES:

1.FINISH:

- 1.1 HOUSING: PPS BLACK, UL94V-0.
- 1.2 CONTACT: COPPER ALLOY, GOLD (SEE P/N) PLATED IN CONTACT AREA, GOLD FLASH PLATED IN SOLDER AREA, 50u"MIN NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING: 4.0 AMP,AC/DC
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 750V,AC/Minute
- 2.3 CONTACT RESISTANCE: 100mΩ MAX.
- 2.4 INSULATION RESISTANCE: 1000 mΩ Min
- 2.5 Operation Temperature:-55°C to +200°C

3.SALT SPRAY TEST:

- 3.1 CONCENTRATION IS 5%, THE TEMPERATURE IS 35±2°C, TEST TIME 8H MIN, NO OXIDATION OR RUST

4.ORDER INFORMATION:






61H9- R XXX XX 156 C 01

90° 弯插

Pin 数码
SEE TABLE
004=2*2PIN
~
150=2*75PIN

端子电镀:
S1=1u" Gold/Tin
S2=3u" Gold/Tin
S5=15u" Gold/Tin
S6=30u" Gold/Tin

塑胶高度:
156=15.60mm

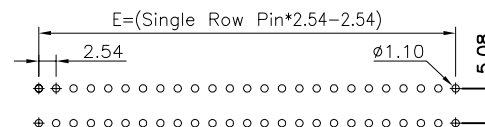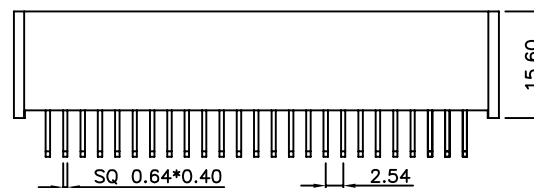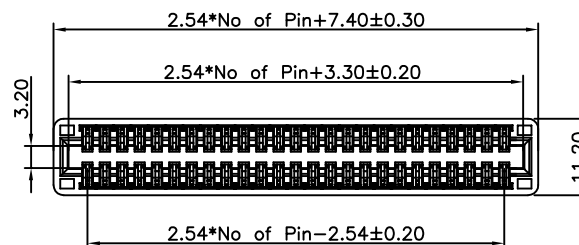

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLERANCE ±0.05

					OPERATION		DRAW	WLY	2023.05.30	SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X	±0.40	DESIGN	Jensen	2023.05.30				
					X.XX	±0.25	CHECK	Jack	2023.05.30				
					X.XXX	±0.15	APPROVE	Andy	2023.05.30				
AO		NEW			Angle	±3°				SHEET	1/1	TITLE:	2.54x5.08mm 金手指 90° 弯插
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.	DRAW NO.	SP-952